

Sugar Cove Berm Maintenance Effort #1 Summary Report

Sugar Cove, Sprecklesville, Maui, Hawaii

November 2015



Prepared for:

Sugar Cove AOA
320 Paani Place #6C
Paia, Hawaii 96779



Prepared by:

Sea Engineering, Inc.
Makai Research Pier
Waimanalo, HI 96795

Job No. 25411



TABLE OF CONTENTS

1. INTRODUCTION	1
1.1 BACKGROUND	1
1.2 PROJECT LOCATION.....	1
1.3 SUGAR COVE BERM MAINTENANCE PLAN PERMITS	4
1.4 PREVIOUS BERM MAINTENANCE EFFORT.....	4
1.5 EXISTING COASTAL CONDITIONS – PRIOR TO BERM MAINTENANCE.....	4
1.5.1 Topography and Profiles (Local Mean Sea Level Datum)	4
2. BERM MAINTENANCE PLAN.....	12
2.1 PURPOSE	12
2.2 PROJECT SCOPE	12
2.3 ENVIRONMENTAL CONSIDERATIONS	12
2.4 PROPOSED BERM MAINTENANCE PLAN.....	12
2.4.1 Maintenance Design	13
2.4.2 Volume and Frequency	13
2.4.3 Physical Triggers.....	15
2.4.4 Equipment List	16
2.4.5 Description of Work.....	16
3. ADAPTIVE MANAGEMENT PLAN	18
3.1 ADAPTIVE MANAGEMENT GOALS	18
3.2 MANAGEMENT TEAM.....	18
3.3 MANAGEMENT TASKS	18
3.4 MANAGEMENT DECISIONS	20
4. BERM MAINTENANCE EFFORT #1 – WINTER 2015.....	22
4.1 MAINTENANCE PLAN PARAMETERS	22
4.2 MAINTENANCE SAND PLACEMENT.....	22
4.3 MAINTENANCE ENVIRONMENTAL CONDITIONS	30
4.4 MAINTENANCE BEST MANAGEMENT PRACTICES	34
5. ADAPTIVE MANAGEMENT PLAN DATA.....	38
5.1 QUALITY OF PLACED MATERIAL	38
5.1.1 Existing Beach Sand	38
5.1.2 Berm Maintenance Sand.....	40
5.1.3 Small Scale Beach Nourishment Standards and Sediment Compatibility	41
5.2 COASTAL AND COASTAL AND MARINE ENVIRONMENTAL CONDITIONS	44
5.2.1 Photographic documentation.....	44
5.2.2 Water Quality Data.....	53
5.3 BEACH PROFILE ADJUSTMENTS.....	53
5.4 MAINTENANCE ACTIVITY LIFECYCLE	63
5.5 EFFECTIVENESS OF MATERIAL PLACEMENT	64
6. BEST MANAGEMENT PRACTICES PLAN.....	65
6.1 GENERAL	65



6.2	SUITABLE MATERIAL	66
6.3	HISTORIC OR CULTURAL FEATURES	66
6.4	ENVIRONMENTAL PROTECTION	66
6.5	SOLID WASTE AND DISPOSAL	67
6.6	WASTE WATERS	68
6.7	EROSION CONTROL	68
6.8	NOISE CONTROL.....	69
6.9	DUST CONTROL:.....	70
6.10	AIR POLLUTION CONTROL:	70
6.11	PROTECTED MARINE SPECIES	70
6.12	OPERATIONAL CONTROLS	71
6.13	STRUCTURE, AUTHORITY, AND RESPONSIBILITY	71
6.14	SUSPENSION OF WORK:	72
7.	CONTINGENCY PLAN.....	73
8.	EMERGENCY SPILL RESPONSE PLAN	75
8.1	PRE-EMERGENCY PLANNING.....	75
8.2	PERSONAL PROTECTIVE AND EMERGENCY SPILL RESPONSE EQUIPMENT	75
8.3	PERSONNEL ROLES, LINES OF AUTHORITY AND COMMUNICATION	76
8.4	EMERGENCY ALERTING AND RESPONSE PROCEDURES.....	76
8.5	EMERGENCY NOTIFICATION AND REPORTING PROCEDURES	77
8.6	SAFE DISTANCE STAGING AREA	77
8.7	SITE SECURITY AND CONTROL	77
8.8	EVACUATION ROUTES AND PROCEDURES	77
8.9	DECONTAMINATION AND DISPOSAL PROCEDURES	78
8.10	EMERGENCY MEDICAL TREATMENT AND FIRST AID.....	78
8.11	AFTER THE SPILL PROCEDURES.....	78
8.12	EMERGENCY CONTACTS.....	79

LIST OF FIGURES

FIGURE 1-1	LOCATION MAP, ISLAND OF MAUI	2
FIGURE 1-2	LOCATION MAP, SUGAR COVE AOA	3
FIGURE 1-3	LOCATION MAP, TAX MAP (SUGAR COVE AOA PROPERTY HAS A RED OUTLINE).....	3
FIGURE 1-4	EXISTING TOPOGRAPHY AND BATHYMETRY AT THE PROJECT SITE, MARCH 11, 2014 (LMSL DATUM)	6
FIGURE 1-5	EXISTING PROFILES AT THE PROJECT SITE, MARCH 11, 2014 (TRANSECTS 7, 5, AND 3 AT TOP, MIDDLE, AND BOTTOM RESPECTIVELY) (LMSL DATUM)	7
FIGURE 1-6	LOOKING EAST ALONG THE RESTORED BEACH, FROM NEAR THE WESTERN BOUNDARY	8
FIGURE 1-7	LOOKING OFFSHORE ACROSS THE RESTORED BEACH, FROM NEAR THE MIDDLE OF THE PROPERTY	9
FIGURE 1-8	LOOKING WEST ALONG THE RESTORED BEACH, FROM NEAR THE EASTERN BOUNDARY	9
FIGURE 1-9	LOOKING INLAND ALONG THE COUNTY BEACH ACCESS ABUTTING THE EASTERN SIDE OF THE PROPERTY AT THE EASTERN EDGE OF THE RESTORED BEACH.....	10

FIGURE 1-10 SAND RIPPLES FORMING IN THE SAND FIELD AND BAR IN THE NEARSHORE WATERS OF THE COVE.....	10
FIGURE 1-11 NEARSHORE SAND FROM THE SAND BAR IS BEACH QUALITY MATERIAL SIMILAR TO THE RESTORED BEACH SAND	11
FIGURE 2-1 PROPOSED BERM MAINTENANCE LOCATION AND CONTOURS (LMSL DATUM)	14
FIGURE 2-2 PROPOSED BERM MAINTENANCE PROFILES (LMSL DATUM)	15
FIGURE 3-1 WATER QUALITY MONITORING STATIONS FOR TURBIDITY SAMPLE COLLECTION.	19
FIGURE 4-1 DUMP TRUCK DELIVERING SAND TO THE WEST END OF THE COVE FOR PLACEMENT ON THE BERM	23
FIGURE 4-2 SMALLER DUMP TRUCK DELIVERING SAND TO THE COUNTY OF MAUI BEACH ACCESS PATH.....	24
FIGURE 4-3 BULLDOZER SPREADING SAND ALONG THE BERM	25
FIGURE 4-4 SAND GRADING ON THE BERM	25
FIGURE 4-5 GRADED SAND WITH FINISHED MAKAI SLOPE AND SILT FENCING ENDING NEAR TRANSECT 3.....	26
FIGURE 4-6 BEACH CONDITION PRIOR TO PLACEMENT ON NOVEMBER 9, 2015	27
FIGURE 4-7 BEACH AND BERM CONDITION AFTER PLACEMENT ON NOVEMBER 10, 2015	27
FIGURE 4-8 COUNTY OF MAUI BEACH ACCESS PATH PRIOR TO SAND PLACEMENT	28
FIGURE 4-9 THREE FOOT SCARP IN COUNTY OF MAUI BEACH ACCESS PATH	29
FIGURE 4-10 COUNTY OF MAUI BEACH ACCESS PATH WITH GRADED MAINTENANCE SAND.....	30
FIGURE 4-11 INSERT CAPTION HERE (FIGURE GOES ABOVE).....	31
FIGURE 4-12 PAUWELA WAVE BUOY DATA FOR NOVEMBER 2015	32
FIGURE 4-13 NOAA WIND DATA FOR KAHULUI HARBOR BETWEEN NOVEMBER 7 AND 11, 2015. 33	
FIGURE 4-14 REGIONAL PRECIPITATION FROM RAIN GAUGES ON MAUI FOR NOVEMBER 2015.....	34
FIGURE 4-15 SIGNAGE POSTING WITHIN THE COUNTY OF MAUI BEACH ACCESS NOTIFYING THE PUBLIC OF THE MAINTENANCE ACTIVITY	35
FIGURE 4-16 CLOSE UP OF THE SIGNS POSTED ON THE BEACH AND AT THE ACCESS DURING THE PROJECT.....	36
FIGURE 4-17 PERMANENT PLACARD MOUNTED ON THE WALL ADJACENT TO THE COUNTY OF MAUI BEACH ACCESS.....	37
FIGURE 5-1 GRAIN SIZE DISTRIBUTION FOR BEACH SAND SAMPLES, COMPOSITE BEACH SAMPLE, AND THE +/- 20% THRESHOLDS	39
FIGURE 5-2 GRAIN SIZE DISTRIBUTION FOR ADJACENT NATURAL BEACH SAND SAMPLES FROM KANAHA BEACH, COMPOSITE SUGAR COVE BEACH SAMPLE, AND THE +/- 20% THRESHOLDS FOR SUGAR COVE	40
FIGURE 5-3 GRAIN SIZE DISTRIBUTION FOR BEACH COMPATIBLE SAND SAMPLE.....	41
FIGURE 5-4 GRAIN SIZE DISTRIBUTION FOR COMPOSITE BEACH SAMPLE, THE +/- 20% THRESHOLDS, AND THE BERM FILL SAND SAMPLE	42
FIGURE 5-5 OVERFILL FACTOR CONVERSION CHART.....	43
FIGURE 5-6 WATER QUALITY CONDITIONS AT SUGAR COVE, 10:15 ON NOVEMBER 09, 2015	44
FIGURE 5-7 WATER QUALITY CONDITIONS AT SUGAR COVE, 09:12 ON NOVEMBER 10, 2015	44
FIGURE 5-8 WATER QUALITY CONDITIONS AT SUGAR COVE, 14:48 ON NOVEMBER 10, 2015	44
FIGURE 5-9 SAND AND PAVEMENT SUBSTRATES TYPICAL OF THE CENTRAL AREA WITHIN THE COVE	46
FIGURE 5-10 SAND SUBSTRATE TYPICAL OF THE SAND BAR AND NEARSHORE SAND FIELD.....	46



FIGURE 5-11 NEARSHORE SAND FROM THE SAND BAR IS BEACH QUALITY MATERIAL SIMILAR TO THE RESTORED BEACH SAND	47
FIGURE 5-12 TURF ALGAE AND HARD BOTTOM TYPICAL OF THE EASTERN PORTION OF THE COVE.	47
FIGURE 5-13 TURF ALGAE, HARD BOTTOM, AND COBBLE TYPICAL OF OFFSHORE OF THE CENTER OF THE COVE.....	48
FIGURE 5-14 TURF ALGAE, HARD BOTTOM, AND BOULDERS TYPICAL OF THE WESTERN SIDE OF THE COVE.....	48
FIGURE 5-15 PRE-MAINTENANCE CONDITIONS NEAR TRANSECT 7 (RIGHT PICTURE) AND TRANSECT 5 (LEFT PICTURE)	49
FIGURE 5-16 PRE-MAINTENANCE CONDITIONS NEAR TRANSECT 3 (RIGHT PICTURE) AND THE COUNTY OF MAUI BEACH ACCESS (LEFT PICTURE)	49
FIGURE 5-17 POST-MAINTENANCE CONDITIONS ON THE BERM AT TRANSECT 5	50
FIGURE 5-18 POST-MAINTENANCE CONDITIONS ON THE BERM LOOKING TOWARD TRANSECT 3 FROM THE WEST	50
FIGURE 5-19 LOOKING MAKAI ALONG TRANSECT 7 (LEFT PICTURE) AND TRANSECT 5 (RIGHT PICTURE), PRE-MAINTENANCE	51
FIGURE 5-20 T LOOKING MAKAI ALONG TRANSECT 3 (LEFT PICTURE) AND THE COUNTY OF MAUI BEACH ACCESS (RIGHT PICTURE), PRE-MAINTENANCE	51
FIGURE 5-21 LOOKING EAST ALONG THE BEACH FACE, FROM TRANSECT 7 TOWARD THE COUNTY OF MAUI BEACH ACCESS	52
FIGURE 5-22 TYPICAL BACKSHORE CONDITIONS AT THE SITE	52
FIGURE 5-23 NOVEMBER 09, 2015 CONDITIONS PRIOR TO INITIATING BERM MAINTENANCE.	54
FIGURE 5-24 NOVEMBER 10, 2015 CONDITIONS IMMEDIATELY FOLLOWING BERM MAINTENANCE	55
FIGURE 5-25 PROFILE 4 + 00. GREEN AND PINK LINES REPRESENT NOVEMBER 09, 2015, AND NOVEMBER 10, 2015, ELEVATIONS RESPECTIVELY.	56
FIGURE 5-26 PROFILE 4 + 50. GREEN AND PINK LINES REPRESENT NOVEMBER 09, 2015, AND NOVEMBER 10, 2015, ELEVATIONS RESPECTIVELY.	57
FIGURE 5-27 PROFILE 5 + 00. GREEN AND PINK LINES REPRESENT NOVEMBER 09, 2015, AND NOVEMBER 10, 2015, ELEVATIONS RESPECTIVELY.	58
FIGURE 5-28 PROFILE 5 + 50. GREEN AND PINK LINES REPRESENT NOVEMBER 09, 2015, AND NOVEMBER 10, 2015, ELEVATIONS RESPECTIVELY.	59
FIGURE 5-29 PROFILE 6 + 00. GREEN AND PINK LINES REPRESENT NOVEMBER 09, 2015, AND NOVEMBER 10, 2015, ELEVATIONS RESPECTIVELY.	60
FIGURE 5-30 PROFILE 6 + 50. GREEN AND PINK LINES REPRESENT NOVEMBER 09, 2015, AND NOVEMBER 10, 2015, ELEVATIONS RESPECTIVELY.	61
FIGURE 5-31 PROFILE 7 + 00. GREEN AND PINK LINES REPRESENT NOVEMBER 09, 2015, AND NOVEMBER 10, 2015, ELEVATIONS RESPECTIVELY.	62
FIGURE 5-32 PROFILE 7 + 50. GREEN AND PINK LINES REPRESENT NOVEMBER 09, 2015, AND NOVEMBER 10, 2015, ELEVATIONS RESPECTIVELY.	62
FIGURE 5-33 PROFILE 8 + 00. GREEN AND PINK LINES REPRESENT NOVEMBER 09, 2015, AND NOVEMBER 10, 2015, ELEVATIONS RESPECTIVELY.	63

LIST OF TABLES

TABLE 4-1 WAVE OBSERVATIONS DURING MAINTENANCE EFFORTS.	32
--	----



TABLE 4-2 WIND OBSERVATIONS DURING MAINTENANCE EFFORTS.	33
TABLE 5-1 GRAIN SIZE DISTRIBUTIONS FOR SUGAR COVE EXISTING BEACH AND BEACH QUALITY FILL SAND (AMERON)	42
TABLE 5-2 OVERFILL CALCULATIONS FOR THE PROPOSED BERM FILL SAND.....	43
TABLE 5-3 WATER QUALITY OBSERVATIONS DURING MAINTENANCE EFFORTS.....	44
TABLE 5-4 WATER QUALITY TESTING RESULTS: NOVEMBER 09, 2015, AT 07:45	53
TABLE 5-5 WATER QUALITY TESTING RESULTS: NOVEMBER 10, 2015, AT 14:00	53

1. INTRODUCTION

1.1 Background

The Sugar Cove AOA (Association) property, located at 320 Paani Place, spans a significant portion of the cove fronting its parcel in Paia, Maui, Hawaii. The Association has solely funded and carried out restoration and maintenance of the beach along approximately 520 feet of shoreline fronting their four-acre property. Beach deflation during the 1980s led to wide spread turbidity plumes emanating from the native clay bank that was exposed during beach narrowing and loss. By 1989 the entire beach had disappeared against the clay bank. In an effort to combat chronic coastal erosion and beach loss, the Association built the Hayashi Beachwall in 1993 and started their beach restoration efforts in 1995.

Prior to the Association's restoration efforts the beach was completely lost and the nearshore waters of the cove were continuously impacted by the release of fine terrigenous material from the natural clay bank. During this period of beach loss the nearshore waters, nearshore benthic environment, sandy nearshore ecosystem were heavily impacted and the sand beach ecosystem was completely lost.

The Association's restoration efforts have restored the public sand beach and its ecosystem within the cove. The restored public beach extends from the coastal armoring structures on the eastern side of the property to the natural, rocky headland on the western side of the cove. This beach restoration program has systematically added sufficient sand volume, over the previous two decades, to re-inflate the entire beach system. As part of these maintenance efforts, the Association routinely adds sand within the County access.

This privately funded, ongoing effort has reestablished the sandy coastline with a County public beach access at the eastern end; improved coastal access along the shoreline; restored the public beach resource; and eliminated the turbidity plume from the native clay bank. More importantly, this ongoing effort has restored the nearshore sandy substrate ecosystem and the sand beach ecosystem, to the benefit of green sea turtles, hawksbill sea turtles, monk seals, native shorebirds, and other fauna that routinely inhabit and utilize public sand beaches in Hawaii.

The Association is continuing their efforts through implementation of a berm restoration program. Without the ongoing restoration and maintenance efforts, history has shown that the natural environment cannot maintain sufficient sediment to support a stable beach system within the cove. Projected sea-level rise coupled with the historic loss of sediment volume indicates that in the absence of the Association's ongoing efforts, there will be no public beach, no sandy coastal access, and no sandy nearshore or beach ecosystems along this section of coastline. Coastal erosion, similar to what is happening at this site, is affecting much of the shoreline along Maui's north shore, compounding the regional impacts.

1.2 Project Location

Sugar Cove is located on the north shore of Maui in the Sprecklesville area, as shown in Figure 1-1. The cove where the Sugar Cove property is located has rocky headlands on the eastern and western sides (Figure 1-2). The property is located on the center and western portions of the

cove, with the restored sandy beach along the shoreline. The properties on both the western and eastern portions of cove have armored shorelines or clay and boulder banks. The property, Tax Map Key (TMK) (2) 3-8-002:003, has a Maui County beach access easement on the eastern boundary of the property (Figure 1-3). The County easement appears as a thin blank strip abutting the parcel. This public easement allows unrestricted access to the restored sand beach, and public trust lands, fronting and maintained by the Association.



Figure 1-1 Location map, Island of Maui



Figure 1-2 Location map, Sugar Cove AOA



Figure 1-3 Location map, Tax Map (Sugar Cove AOA property has a red outline)

1.3 Sugar Cove Berm Maintenance Plan Permits

State:

Department of Land and Natural Resources SSBN MA-15-02

County of Maui:

Department of Planning SMX 2015/0249, SM2 2015/0057, SSA 2015/0041, EAE 2015/0052

1.4 Previous Berm Maintenance Effort

The previous effort was supported under a County of Maui Special Management Area Permit and was conducted in the summer 2011. This effort placed 824 cubic yards of sand on the berm.

No maintenance was conducted during the 4 years interim period.

1.5 Existing Coastal Conditions – Prior to Berm Maintenance

The coastline between Paia and Kahului meanders along a generally north-northwest facing oriented shoreline. Numerous small embayments are located between rocky or armored headlands along this stretch. Though some areas have sand beaches, chronic shoreline retreat has resulted in beach loss or narrowing along much of this region's shoreline. Decades of sand mining combined with rising global sea level have contributed to the loss or degradation of many of these sandy beaches, as they are increasingly replaced by shoreline armoring, or they disappear against a backdrop of clay banks and boulder beaches. The once sandy headlands that were common to the area are now completely gone, with sparse sand beaches dotting a once golden shoreline.

The public sand beach at Sugar Cove is composed primarily of beach quality fill sand placed on the shoreline by the Association. The current beach sits atop and makai of the Hayashi Beachwall, built in 1993. The cusped beach shape (Figure 1-4) forms a wide curve between the natural western headland and the shoreline armoring headland on the eastern side.

The shallow fringing reef attenuates much of the incident wave energy before it reaches the shoreline. A shallow sand bar has formed in the nearshore waters; further minimizing wave energy and helping to stabilize the nearshore sediment connected to the beach system. The orientation of the sand bar and shoreline wave fronts is a reflection of the beach shape.

1.5.1 Topography and Profiles (Local Mean Sea Level Datum)

The elevation data presented was collected on March 11, 2014, at the end of the winter season.

The sand beach fronting the parcel extends 60 to 90 feet from the 0-foot contour at local mean sea level (lmsl) to the beachwall's backstop. Beach profiles in the western area (Transect 7), middle area (Transect 5), and eastern area (Transect 3) have active beach face, or foreshore, slopes ranging from 1V:6H to 1V:8H, moving west to east (Figure 1-5). The berm crest in the profiles is around +8 feet in elevation, with a narrow berm sloping upward to the backstop for the beachwall. The nearshore is predominantly a sand field in the middle of the cove.

The restored beach has a stable berm between the active berm crest and the beachwall's backstop (Figure 1-6, Figure 1-7, and Figure 1-8). The County beach access at the east end of the beach (Figure 1-9) has a sand slope leading inland.

The nearshore portions of the beach profiles extend into a ripple covered sand field in the middle of the cove (Figure 1-10). Rocky pavement and boulders extend offshore of the western headland and eastern shoreline armoring units. The nearshore sand field, including the sand bar, has well sorted sands with minimal fine content, similar to the beach sand (Figure 1-11). Smaller and heavier terrigenous sand sized sediment has accumulating in each ripple's trough.

Currently, enough volume has been restored to the beach to allow the nearshore sand field to store sand in the bar, extending the active beach profile well into the nearshore waters. This is an indication that the current volume of restored sand is supporting a healthy beach system, and should be maintained as part of the Association's ongoing restoration and maintenance program.

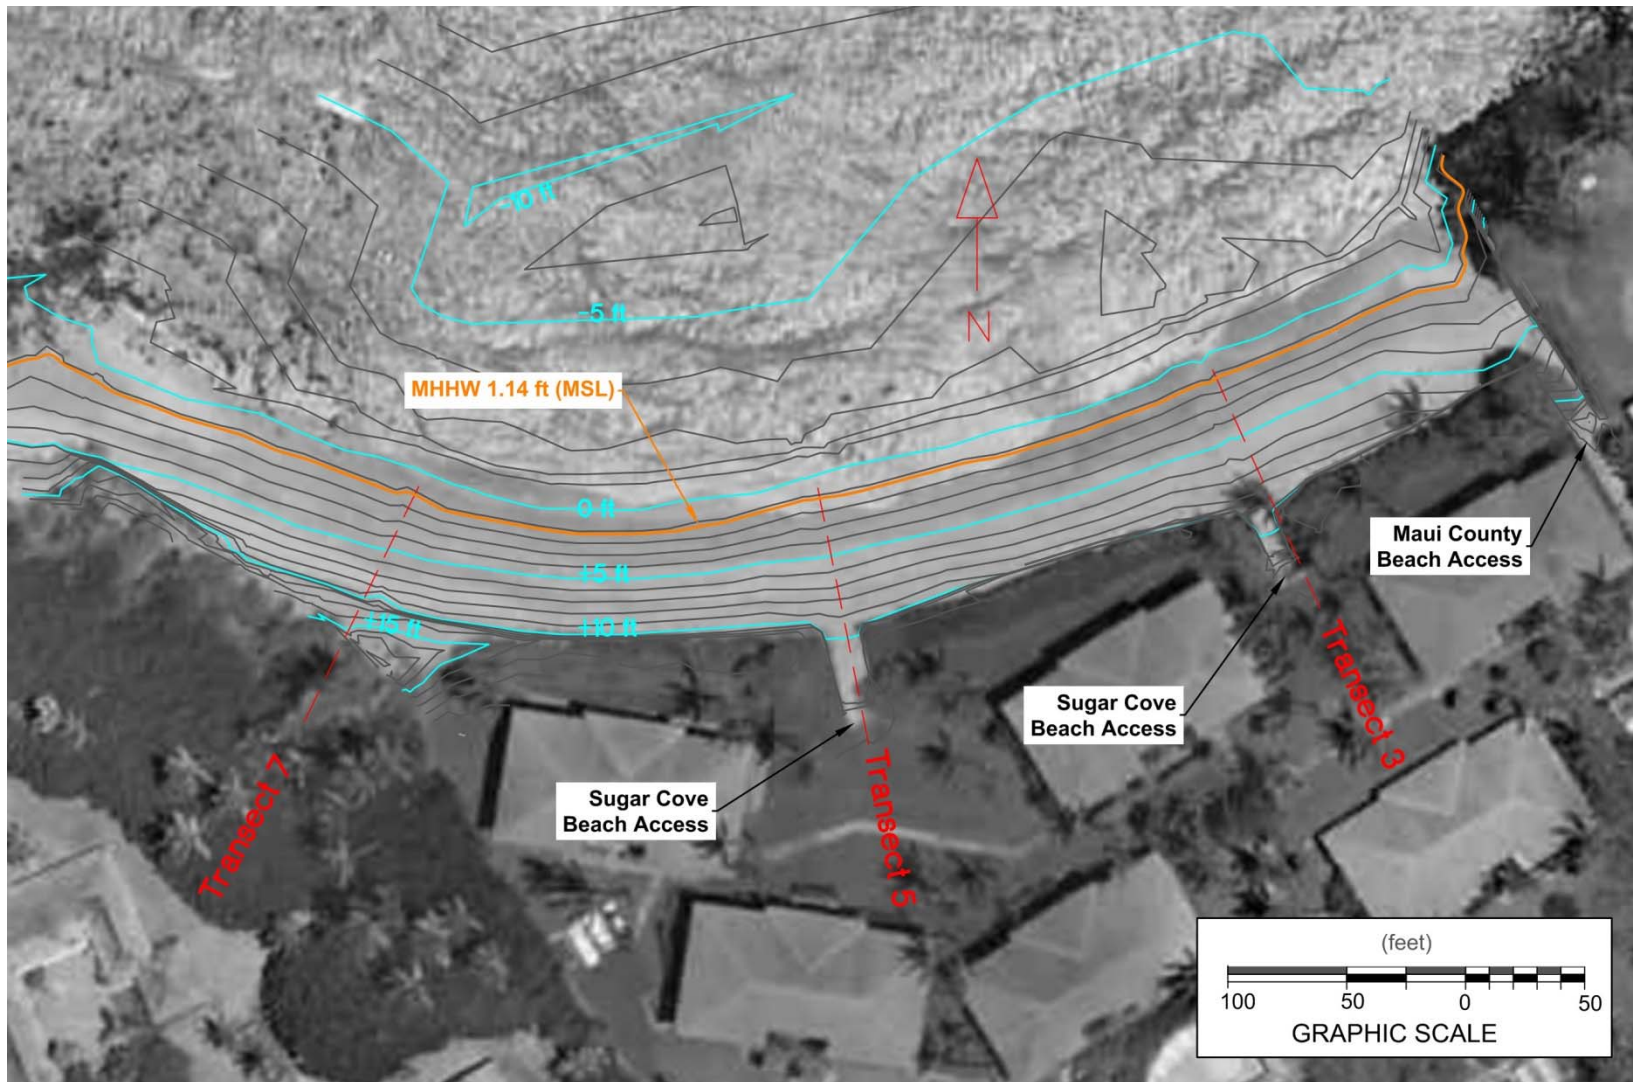


Figure 1-4 Existing topography and bathymetry at the project site, March 11, 2014 (LMSL datum)

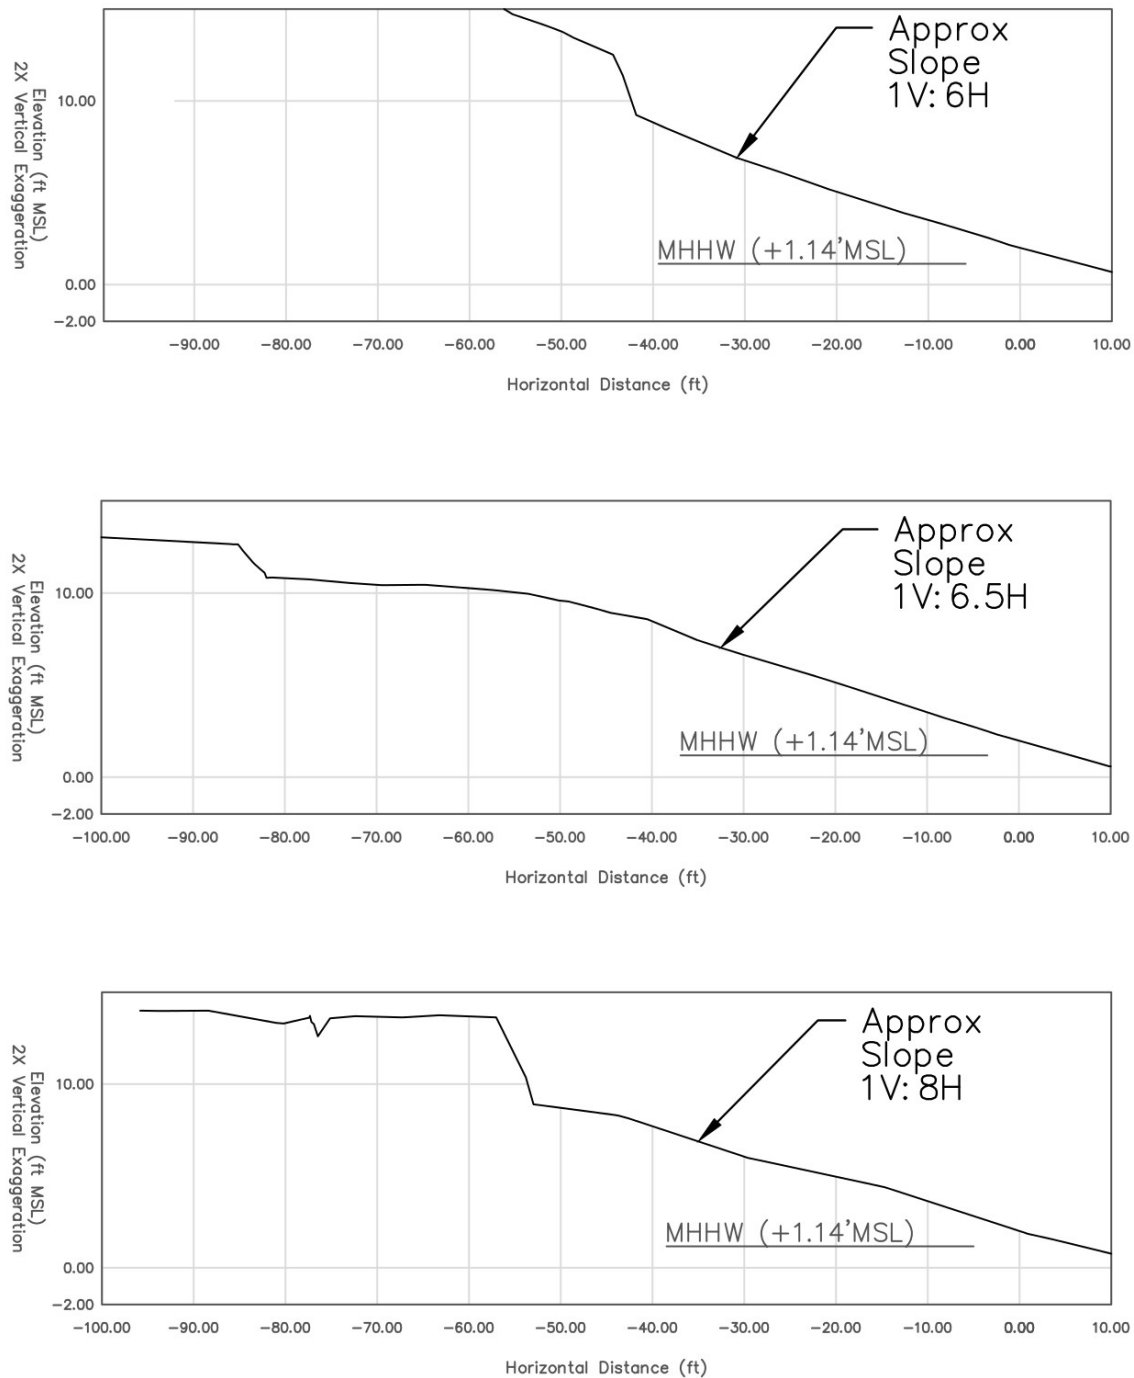


Figure 1-5 Existing profiles at the project site, March 11, 2014 (Transects 7, 5, and 3 at top, middle, and bottom respectively) (LMSL Datum)



Figure 1-6 Looking east along the restored beach, from near the western boundary



Figure 1-7 Looking offshore across the restored beach, from near the middle of the property



Figure 1-8 Looking west along the restored beach, from near the eastern boundary



Figure 1-9 Looking inland along the county beach access abutting the eastern side of the property at the eastern edge of the restored beach



Figure 1-10 Sand ripples forming in the sand field and bar in the nearshore waters of the cove



Figure 1-11 Nearshore sand from the sand bar is beach quality material similar to the restored beach sand

2. BERM MAINTENANCE PLAN

2.1 Purpose

Shoreline restoration and ongoing maintenance has been a necessary activity along the coastline fronting Sugar Cove since the loss of the natural beach. The absence of a natural beach since 1989 indicates that the factors controlling beach stability are working in opposition to maintenance efforts. Maintaining the restored berm will require continued placement of sand, high on this erosion prone shoreline, if a sandy coast is desired for the long-term.

The unique setting and conditions at Sugar Cove provide a rare opportunity to merge public and private interests; utilizing private funds to sustain public trust lands. All maintenance activities and costs, borne solely by the Association, have resulted in a publicly accessible and widely used sandy shoreline with a County beach access at the eastern end.

Restoration of the sandy ecosystem has wide spread environmental benefits. The north shore of Maui is rapidly losing sandy shorelines and nearshore sandy substrate. These sandy areas are important to green sea turtles, hawksbill turtles, monk seals, shorebirds, and host of other native and endemic coastal fauna.

2.2 Project Scope

The approved berm maintenance plan incorporates all the previous profile and restoration effort data as well as modern conditions for site evaluation and quantification of the successful ongoing coastal restoration and maintenance program. The plan identifies key thresholds for the ongoing maintenance of the berm and target volumes and profiles for placement of beach quality fill material.

Ongoing maintenance necessitated development of a monitoring plan that can be used for adaptive management. Water quality (turbidity) monitoring, visual and photographic assessments of the beach, water, and marine environment, and continuation of the ongoing beach profiling effort will all be part of the monitoring effort. In addition, each cycle of maintenance activity will be approved by the OCCL for sand quality and placement design prior to the maintenance activity.

2.3 Environmental Considerations

Sandy coastlines are inherently dynamic environments. Beach health, as quantified by volume, slope, and position, is controlled by numerous factors, both natural and anthropogenic. The dominant factors are total water level, wave environment, and available sediment volume within the littoral cell, or sand cell. An additional and key factor in this project is the character of the inland substrate.

2.4 Proposed Berm Maintenance Plan

Berm maintenance efforts are designed to sustain a stable littoral cell volume through programmatic placement of beach quality fill sand. The design placement area and volumes balance the natural erosive forces acting upon the coastline, preventing a drawdown of beach

profiles and shoreline recession along the beach face. In the beach's current, restored condition, much of the littoral cell volume loss resulting from the impacts of chronic erosion is in the upper berm area, inland of the berm crest at the top of the foreshore slope.

2.4.1 Maintenance Design

The maintenance program places beach quality fill sand high on the beach profile, to augment the overwash berm that rests against and atop the Hayashi Beachwall. The 0-foot contour should remain stable if sufficient sand is supplied to protect the dry beach during wave events. This will minimize sand volume lost to offshore currents.

Beach quality fill is designed to be placed from the +5-foot contour to the backstop of the beachwall (Figure 2-1). Fill material will grade upward at a 1V:3H slope from the +5-foot contour to +12 feet, and then extend inland until intersecting the backstop. Profiles (Figure 2-2) illustrate the fill material placement location high on the beach profile.

This placement, high on the beach profile and well above tidal influence, will significantly improve residence time, while also minimizing losses to wave action.

2.4.2 Volume and Frequency

Fill volumes are based on the previous restoration efforts in 2011, which placed nearly 1,250 cy of beach quality sand. This effort lasted approximately 3 years before berm deflation began to threaten the stability of the 0-foot contour location. A portion of the fill material was incorporated in the nearshore sand bar and assisted with stabilization of the nearshore sand field.

The goal is to provide enough sediment to allow for maintenance of the berm's elevation, while minimizing loss and maximizing residence time. A volume of roughly 1,000 cy of sand will be sufficient for conducting routine berm maintenance on a roughly 2-year cycle. Extreme wave events or phenomena such as tsunamis, hurricanes, or high elevation meso-scale eddies may result in a truncated schedule due to episodic erosion events. In addition, the prolonged break in berm maintenance since the previous 2011 effort may require shorter maintenance cycles in the beginning of the plan.

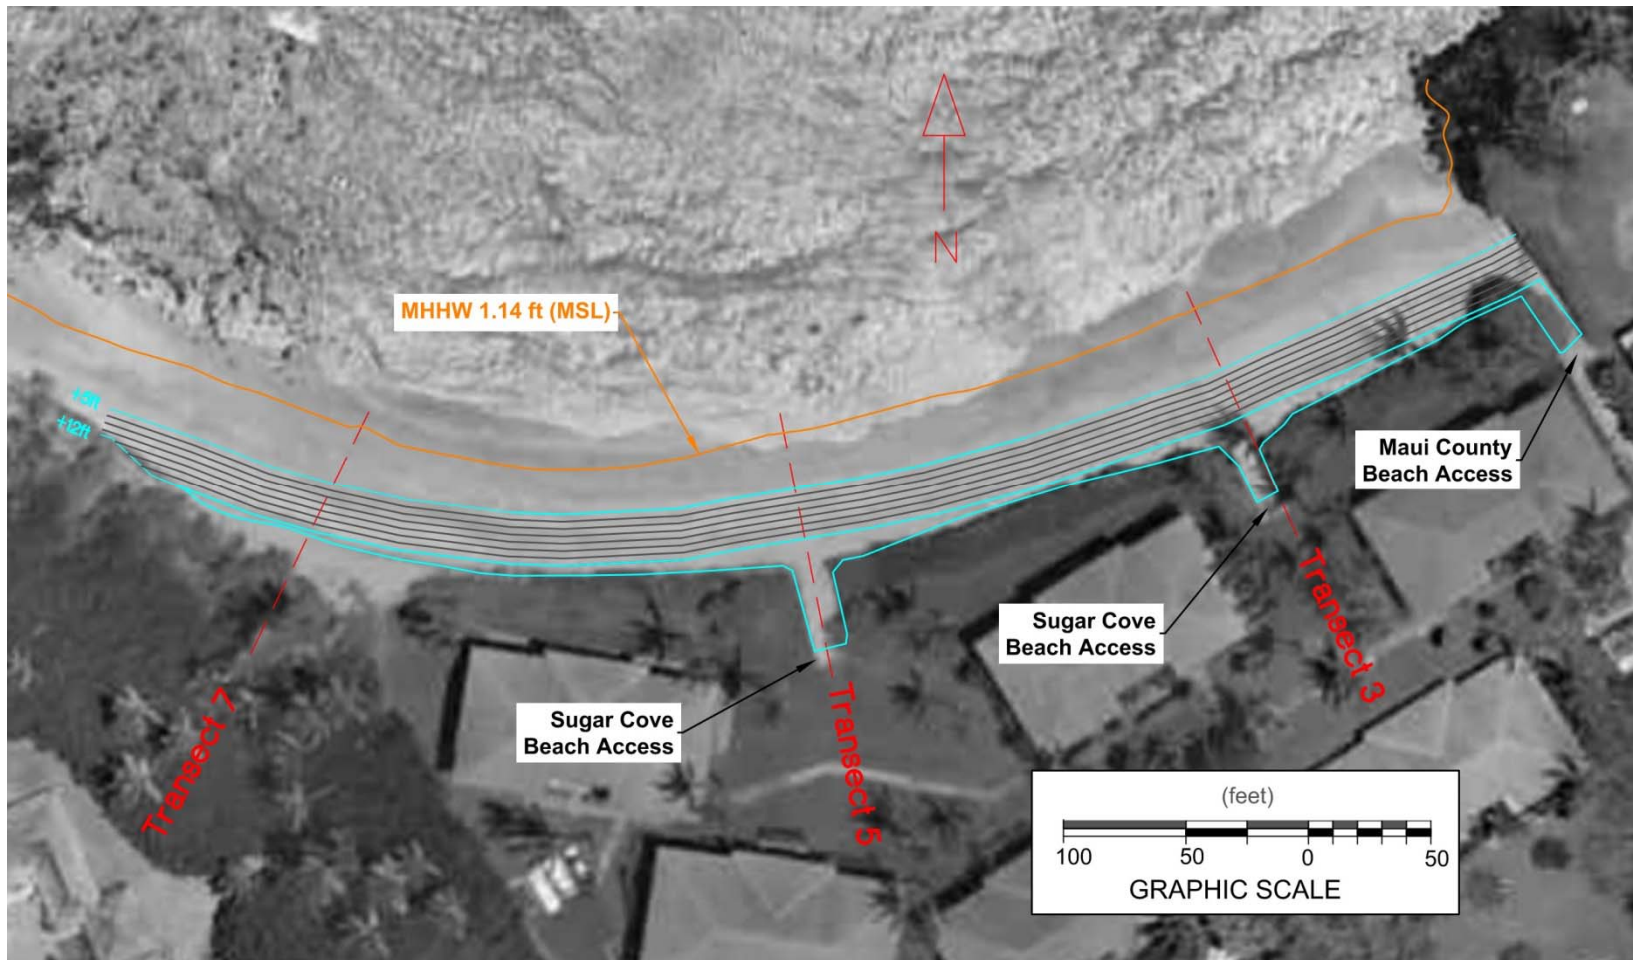


Figure 2-1 Proposed berm maintenance location and contours (LMSL Datum)

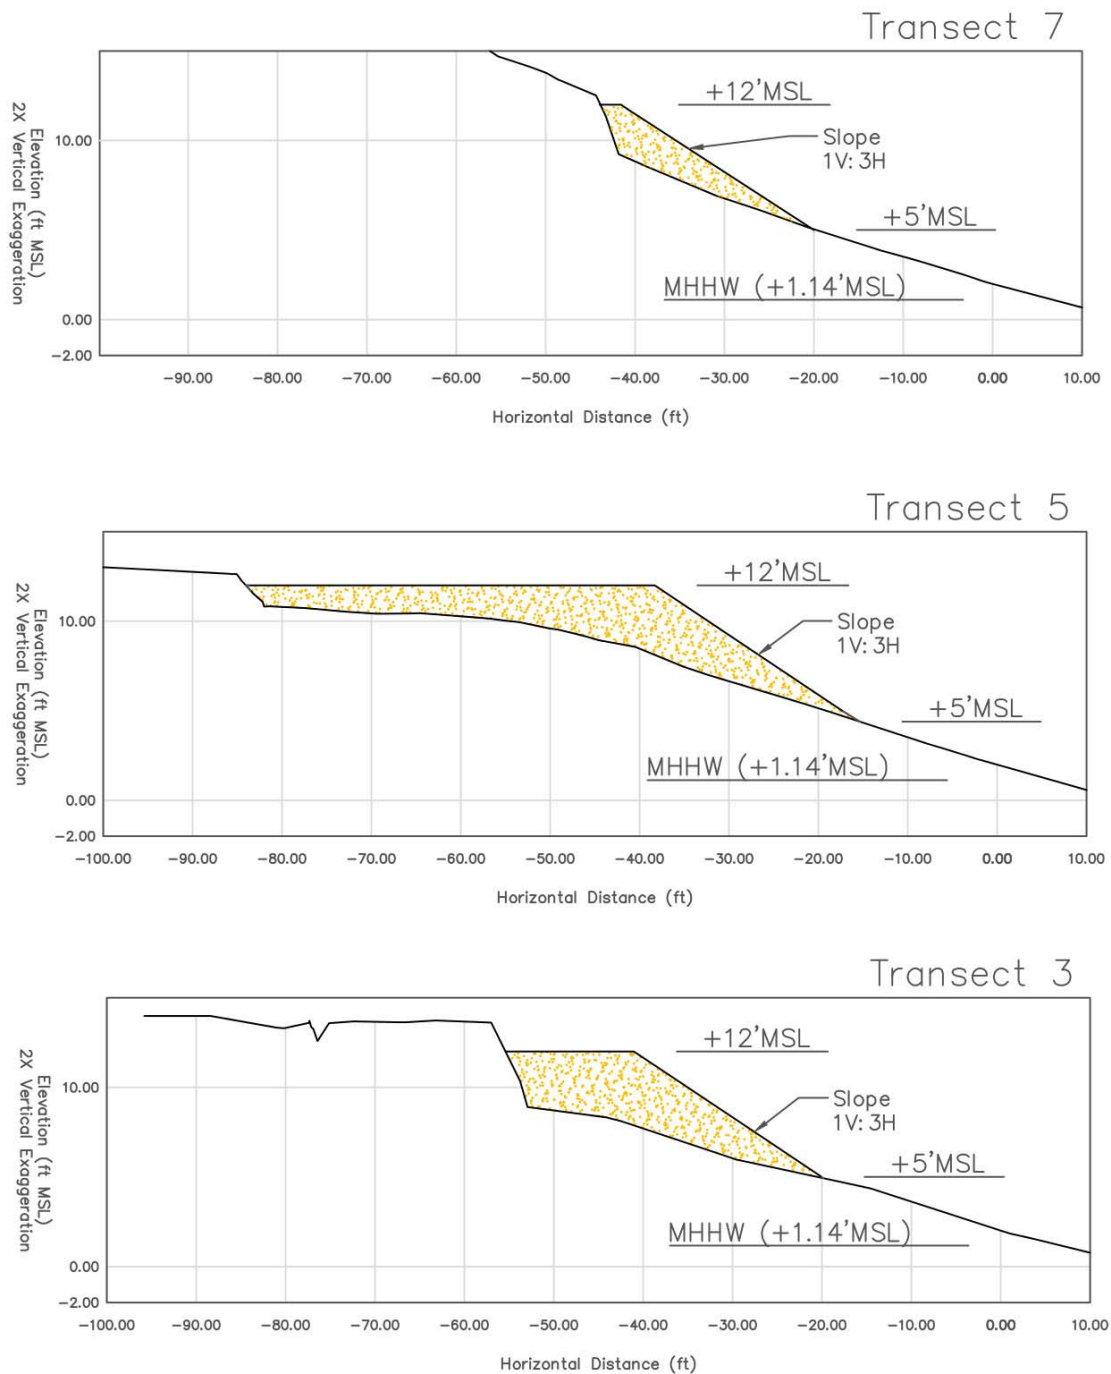


Figure 2-2 Proposed berm maintenance profiles (LMSL Datum)

2.4.3 Physical Triggers

Berm deflation is the primary physical trigger for identifying when to conduct routine volume maintenance efforts. As a general indicator, when the seaward portion of the berm and berm

crest are at elevation close to or below +10 feet in elevation, the next maintenance effort should be conducted. At that time approximately 1,000 cy of beach quality sand should be added to the upper portion of the profile, during the maintenance effort.

Long-term stability of the beach will be monitored using the relative location of the 0-foot contour to the beachwall. Transect 5, located in the center of the beach and affected the least by seasonal wave climates, is an appropriate location to monitor this beach width indicator. In the event that the 0-foot contour begins to migrate inland, maintenance should be conducted as quickly as possible. An approximate volume of 3,500 cubic yards should be added, extending from the +2.5-foot contour to +12 feet, for rapid stabilization of the beach system, or several 1,000 cy efforts should be conducted over a one-year period.

2.4.4 Equipment List

Level, Total Station, or RTK Survey System – for elevations

Dump truck(s) – for sand delivery

Bulldozer – for sand placement and grading

2.4.5 Description of Work

This work is simple in nature, and consists of delivery and grading of beach quality fill sand on the upper portion of the profile. Each maintenance cycle will require a single work day for placement and grading of beach quality fill sand on the beach berm.

- The 5-foot contour will be identified and marked on the foreshore.
- Silt booms or fence will be placed on the makai side of the 5-foot contour.
- Dump trucks will bring the material to the western side of the Association's property, and place the sand directly onto the beach berm, makai of the erosion scarp.
- Ingress and egress of machinery will be along the western side of the property. Equipment will be brought onto the site through the parking lot, and material will be transferred to the beach at the western end of the project site. Equipment will transit across the property, to the beach.
- There will be no stockpiling or equipment storage on the property.
- A bulldozer, similar in size to a D-5 or D-7, will transit across the property to the beach berm, and will remain on the beach throughout the day while spreading sand. The bulldozer will spread the sand from the west to the east, as the dump trucks are delivering the material directly to the beach berm.
- Contemporaneous delivery and spreading of the material will minimize the area needed to transfer the material directly onto the berm.
- The bulldozer will also push sand mauka within the Association's access paths, and the County access if appropriate.
- Some fill material may be delivered through the County access for distribution at the eastern end of the berm, if appropriate. This sand will also be placed directly on the beach berm.
- The makai face of the fill material will be graded to a 1V:3H slope.



- The surface of the material will be back bladed to leave the fill material available for immediate use.
- Silt fences and the markings for the 5-foot contour will be removed.
- Each maintenance action, placing 1,000 cubic yards and grading to specifications on the berm, will be completed within a single work day.

3. ADAPTIVE MANAGEMENT PLAN

This plan establishes a programmatic, managed approach that allows for ongoing monitoring and adaptive management. The 10-year lifespan of the management plan, covering multiple berm maintenance efforts requires ongoing monitoring of beach face and nearshore elevations, review of berm fill sand prior to each placement, review of the placement plan prior to each effort, monitoring of each effort both during and after placement, and environmental monitoring to include water turbidity monitoring, benthic photographic documentation, and marine and coastal environmental photographs.

3.1 Adaptive Management Goals

The adaptive management plan will review each previous effort for the following:

- Quality of placed material, after placement
- Observed beach and ocean conditions
- Beach profile adjustments
- Maintenance activity lifecycle

The plan will use the data collected to quantify and qualify the effectiveness of material placement during each berm maintenance cycle, and the material's impact, or lack thereof, on the environment.

3.2 Management Team

The management team will consist of the following:

- A Sugar Cove AOA representative
- A technical consultant
- A representative from the Office of Conservation and Coastal Lands

Recommended team members to include:

- Sea Grant Extension Agent positioned with the Maui County Planning Department

3.3 Management Tasks

Quality of Placed Material

Prior to each maintenance effort, grain size analysis of the beach quality sand proposed for use will be provided to the OCCL for review. OCCL will review the proposed sand under the existing SSBN sand source guidelines. OCCL sand source approval will be required prior to initiating each maintenance effort.

Six months after placement, a composite sand sample from the berm will be analyzed for grain size distribution. These data will be compared to the pre-placement beach sample and berm maintenance fill sand sample data to document any changes in character to the beach sand.

Observed Coastal and Marine Environmental Conditions

Conditions will be documented through photographs of the nearshore waters, nearshore substrate characteristics, location of the shoreline, and general condition of the beach and backshore.

Photographs will be collected from along each of the three transects and across the cove from each end of the beach. These photographs will be collected just prior to start of each effort, during placement, and after placement. Additional photographs will be collected during each beach profile effort.

In addition, water quality data will be collected during monitoring activities and provided as a quantitative evaluation of conditions at Sugar Cove and local control sites. Water quality data will consist of turbidity measurements and documented environmental conditions. Two control sites have been identified in analogous coastal environments to the east and west of Sugar Cove.

Figure 3-1 identifies the locations of each sample station. Each sample station is located approximately 150 feet from the waterline. Control Station East is located at Baldwin beach, approximately 0.65 miles east of the project site station. Sugar Cove Station is located in the middle of the project beach. Control Station West is located at Spreckelsville Beach, approximately 0.45 miles west of the project site station.



Figure 3-1 Water quality monitoring stations for turbidity sample collection.

Beach Profile Adjustments

Beach profiles will be collected before and after each placement, and continuing on with the semi-annual schedule. These beach profile data will be collected at the three previously identified locations. Data will be added to the long-term record for review and analysis.

Maintenance Activity Lifecycle

The project will be reviewed prior to each berm maintenance effort to assess the duration of previous berm maintenance actions, with respect to the beach quality sand augmenting the dry beach volume and profile.

Effectiveness of Material Placement

Each placement will be photographed to document beach conditions prior to placement, during placement, immediately after placement, and semi-annually after placement. Photographs will be taken along each of the transect locations and looking in multiple directions, to capture existing beach conditions.

Review

Data from each of these tasks, combined with the photograph sets, will be reviewed prior to the next berm maintenance effort. Each review will detail potential erosion events, such as extreme waves, storms, or tsunamis, which may have impacted the shoreline. Each review will discuss the volume placed, starting and ending profiles, environmental conditions including both nearshore and beach areas, water quality as documented through turbidity sample data collection, and berm maintenance material characteristics from previous efforts. Each review will also revisit alternative measures to assess their viability under current conditions.

3.4 Management Decisions

The maintenance program will place beach quality fill sand high on the beach profile, to augment the overwash berm that rests against and atop the Hayashi Beachwall. The 0-foot contour should remain stable if sufficient sand is supplied to protect the dry beach during wave events. This will minimize sand volume lost to offshore currents.

Physical Triggers for Berm Maintenance:

Berm deflation is the primary physical trigger for identifying when to conduct routine volume maintenance efforts. As a general indicator, when the seaward portion of the berm and berm crest are at elevation close to or below +10 feet in elevation, the next maintenance effort should be conducted. At that time approximately 1,000 cy of beach quality sand should be added to the upper portion of the profile, during a single day maintenance effort.

Additional triggers are beach width and beach slope at Transect 5. Transect 5 is the least affected by the seasonal changes in winter and summer, and is the good indicator of long-term changes in the littoral cell. Beach width, measured at the 0-foot contour, at Transect 5 routinely returns to 100 feet from the profile's reference point, and is increasing stable at that width with the gradual, cumulative increase in littoral cell sediment. An additional trigger will be when the 0-foot contour narrows to less than 100 feet from the Transect 5 reference point. Berm deflation is typically coupled with flattening of the foreshore slope. A return of the foreshore slope to

between 1V:6H to 1V:8H is another physical trigger that will indicate a need for future maintenance actions.

Ensuing Berm Maintenance Design:

The management team reviews existing data from the previous berm maintenance effort(s), prior to the next effort to determine if the proposed design and materials are within the scope of this management plan and the Small Scale Beach Nourishment program. The management team determines if the previous effort(s) were successful in design and implementation. They review the proposed maintenance effort design and materials, with respect to the previously collected data sets, including the history of environmental conditions from previous effort(s). Specifically, the proposed berm maintenance sand is evaluated based on the requirements within the SSBN program and past performance of the material, if applicable, when used for berm maintenance.

If the team determines that alteration(s) are needed for the upcoming berm maintenance effort, and these alterations can be supported by the existing data, then the design and materials will be adapted as needed.

4. BERM MAINTENANCE EFFORT #1 – WINTER 2015

This berm maintenance effort was conducted over a day and half, from the morning of November 9 to mid-day on November 10, 2015.

4.1 Maintenance Plan Parameters

Trigger: The berm elevation at Transect 5 was deflated to below the trigger elevation of +10 feet. The berm had been below the trigger elevation since before the initial submission of the SSBN application in August of 2014. During the interim period between initial submission of the application and placement of the maintenance sand during the first effort in November of 2015 there were numerous large wave events and several small tsunamis, each of which further deflated the beach face.

Sand Source: Ameron Maui Dune Sand was used for the maintenance effort, as was approved with SSBN MA-15-02. Calculations based off of existing and maintenance sand grain size analysis indicate that an overfill factor of 1.26 may be needed for the maintenance sand.

Volume: The recommended volume for each maintenance event is 1,000 cubic yards of placed sand. Maintenance operations resulted in placement of 1205 tons of sand on the beach, including 60 tons of sand in the County of Maui beach access path. Using a conversion factor of 1.35 tons per cubic yard results in 892 cubic yards of sand placed, with nearly 45 cubic yards of sand placed in the access path.

4.2 Maintenance Sand Placement

Delivery Method: Tavares Trucking utilized four vehicles to maintain consistent delivery pace. Morning and afternoon delivery speeds were negatively impacted by local traffic issues. Truck delivery of sand to the berm was at the west end of the embayment, through the Sugar Cove property to the public beach. A small gap was cut into the sand bank (Figure 4-1) allowing the trucks to deliver sand directly to the berm. Truck delivery of sand to the County of Maui beach access utilized a smaller truck and delivered sand directly to the beach access from the street (Figure 4-2).



Figure 4-1 Dump truck delivering sand to the west end of the cove for placement on the berm



Figure 4-2 Smaller dump truck delivering sand to the County of Maui beach access path

Placement: A single operator, contracted by Tavares Trucking, used a Caterpillar D4G bulldozer (Figure 4-3) to move sand along the berm and shape the new sand bank (Figure 4-4). Sand pushing and grading was completed from west to east along the berm. All sand moving and grading was conducted on the berm, makai of the shoreline vegetation and well inland from mean higher high water. The maintenance sand berm abutted the boulders and sand bank on the mauka side, and extended from the west end of the property to Transect 3. Low elevation of the existing berm prevented placement of the maintenance sand between Transect 3 and the County of Maui beach access path (Figure 4-5). Sand placed within the County of Maui beach access was brought in from the street and pushed down the beach access by the Caterpillar operator.



Figure 4-3 Bulldozer spreading sand along the berm



Figure 4-4 Sand grading on the berm



Figure 4-5 Graded sand with finished makai slope and silt fencing ending near Transect 3

Final Grade: The upper portion of the berm maintenance sand was placed atop the low elevation berm (Figure 4-6) on the beach profile, and was graded to a nearly horizontal plane (Figure 4-7). The makai face of the material was graded to as gentle a slope as was possible, given the already deflated and narrow beach profile. 60 ton of sand was placed in the County of Maui beach access to cover the pre-existing irregular grade (Figure 4-8), including a 3 foot tall ledge (Figure 4-9). The final grade in the access was a smooth slope from the top of the access path to the beach berm (Figure 4-10).



Figure 4-6 Beach condition prior to placement on November 9, 2015



Figure 4-7 Beach and berm condition after placement on November 10, 2015



Figure 4-8 County of Maui beach access path prior to sand placement



Figure 4-9 Three foot scarp in County of Maui beach access path

a



Figure 4-10 County of Maui beach access path with graded maintenance sand

4.3 Maintenance Environmental Conditions

Environmental observations were collected routinely before, during, and after project operations.

Tides: Spring tides with the new moon were highest during the night with lower low tides in the morning (Figure 4-11). Both days had morning lows around 0 feet mllw and mid-afternoon lower highs of less than 2 feet mllw. The maintenance activity schedule ensured that placement and grading operations were generally during lower tides. There were no meso-scale eddies or other significant factors effected water level.

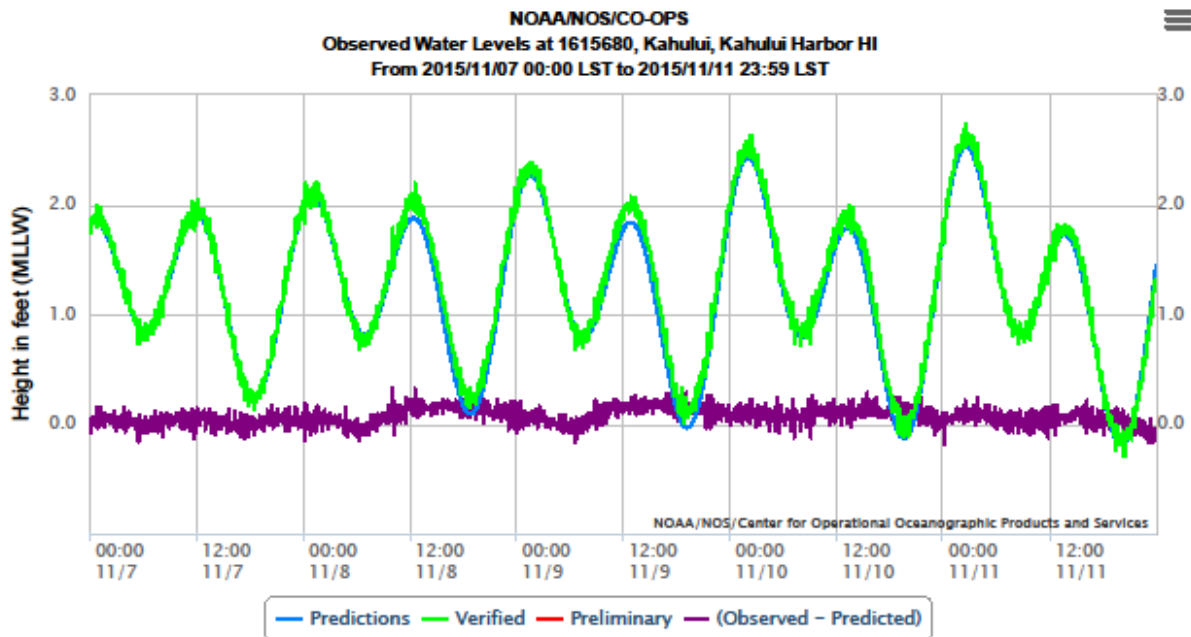


Figure 4-11 Insert Caption Here (Figure goes above)

Waves: Waves at the offshore buoy, located at Pauwela, Maui, recorded moderately large waves directly before and on the first day of the project (Figure 4-12). This large east swell was impacting the region for several days before and during the first day of placement. The month of November, 2015, had several periods of large waves immediately following the maintenance effort. Wind waves along the coastline were well developed and present for the duration of the project. During placement observations of wave face heights at the reef crest directly offshore of the cove and at the sandbar inside the cove are presented in Table 4-1.

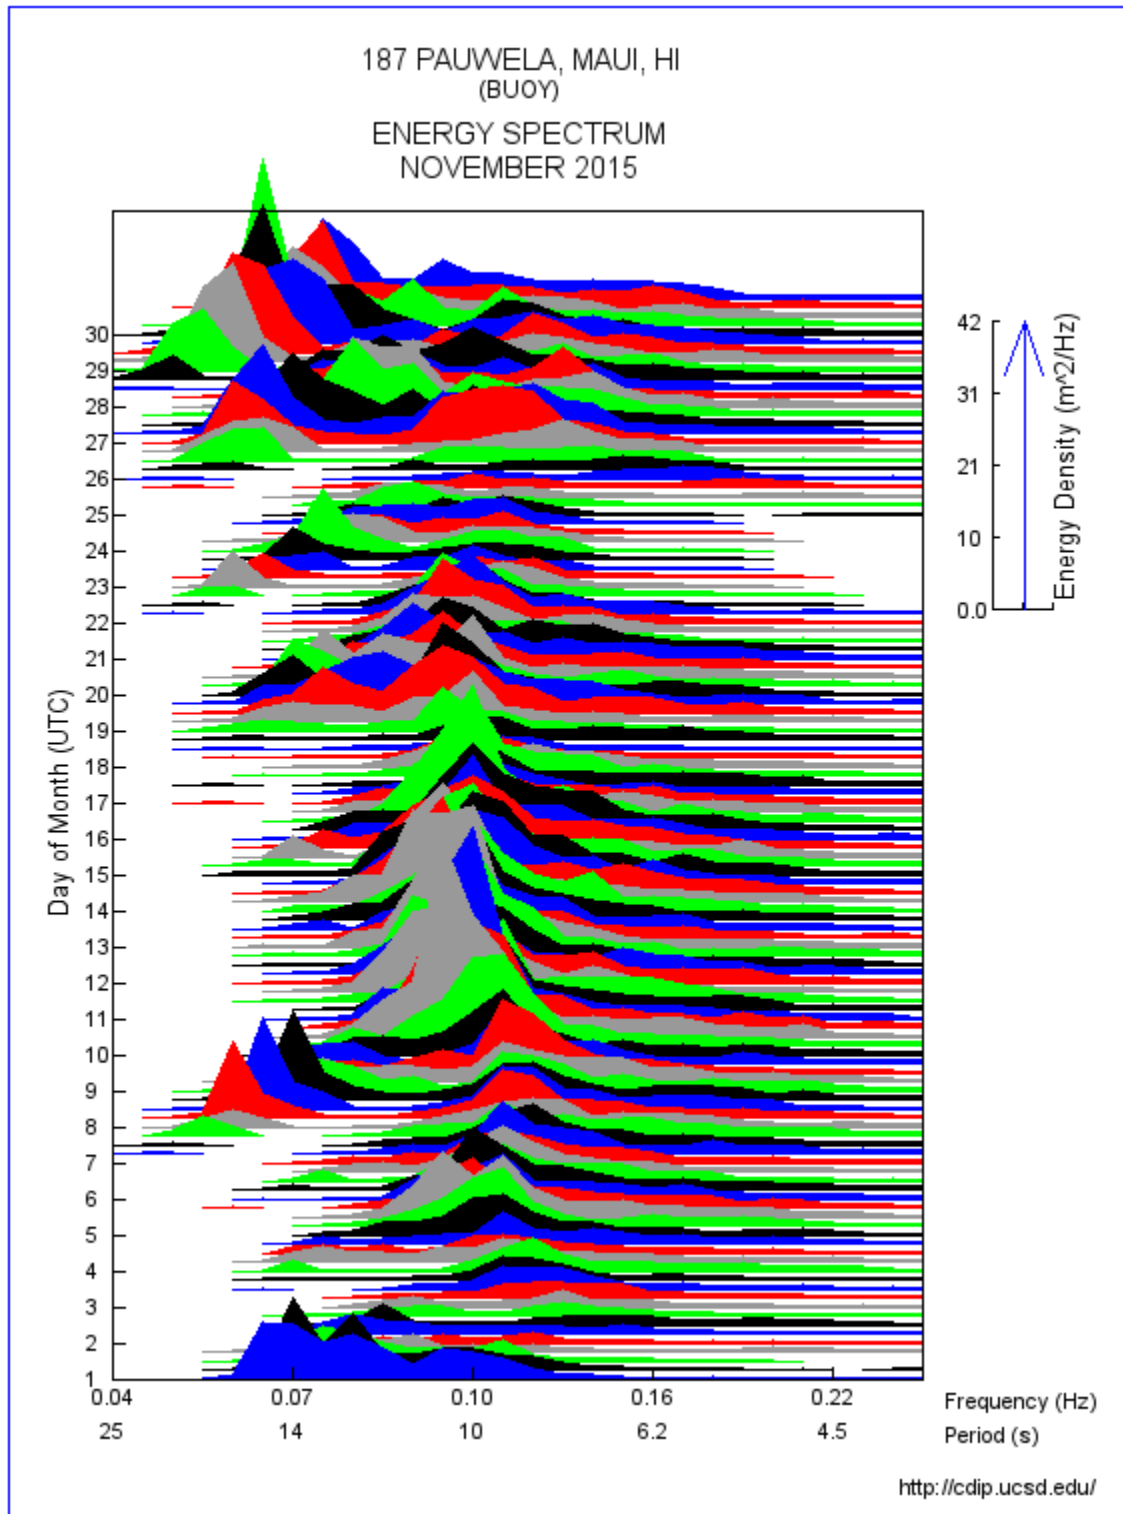


Figure 4-12 Pauwela wave buoy data for November 2015

Table 4-1 Wave observations during maintenance efforts.

Date - Time	Reef Crest Wave Height (ft)	Sandbar Wave Height (ft)
2015/11/09 - 0700	4 – 6	2 – 4
2015/11/09 - 1130	4 – 6	2 – 4
2015/11/09 – 1630	4 – 6	2 – 4
2015/11/10 – 0700	4 – 6	2 – 4
2015/11/10 – 0915	4 – 6	2 – 4
2015/11/10 – 1430	4 – 6	2 – 4

Winds: Winds at the project site were high for the duration of the project, with speeds of 15 – 20 miles per hour (mph) and gusts above 30 mph. General wind direction was out of the northeast.

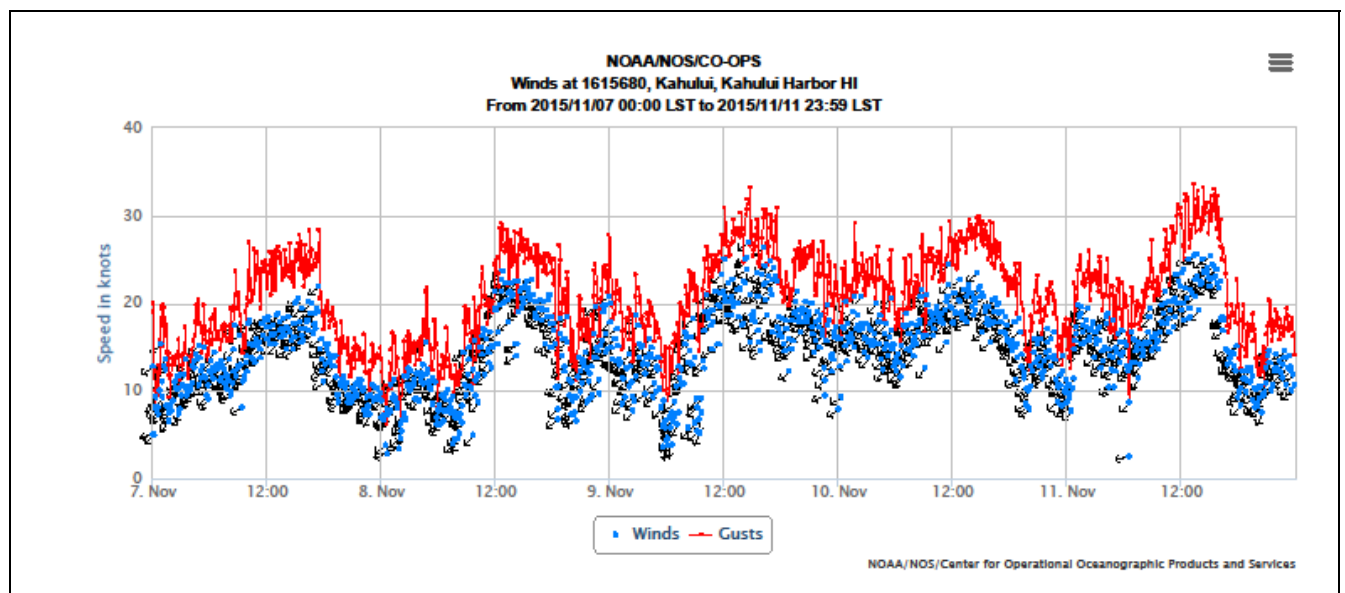


Figure 4-13 NOAA wind data for Kahului Harbor between November 7 and 11, 2015

Table 4-2 Wind observations during maintenance efforts.

Date - Time	Winds Speed at Cove
2015/11/09 - 0700	25+ mph
2015/11/09 - 1130	20+ mph
2015/11/09 – 1630	25+ mph
2015/11/10 – 0700	15+ mph
2015/11/10 – 0915	25+ mph
2015/11/10 – 1430	25+ mph

Precipitation: The local area had heavy rains for two days before the project started. The month of November has well above average rainfall for the month (Figure 4-14), with greater

than 150% above average rainfall for the area during the month. Only passing showers were noted during the two days of maintenance efforts.

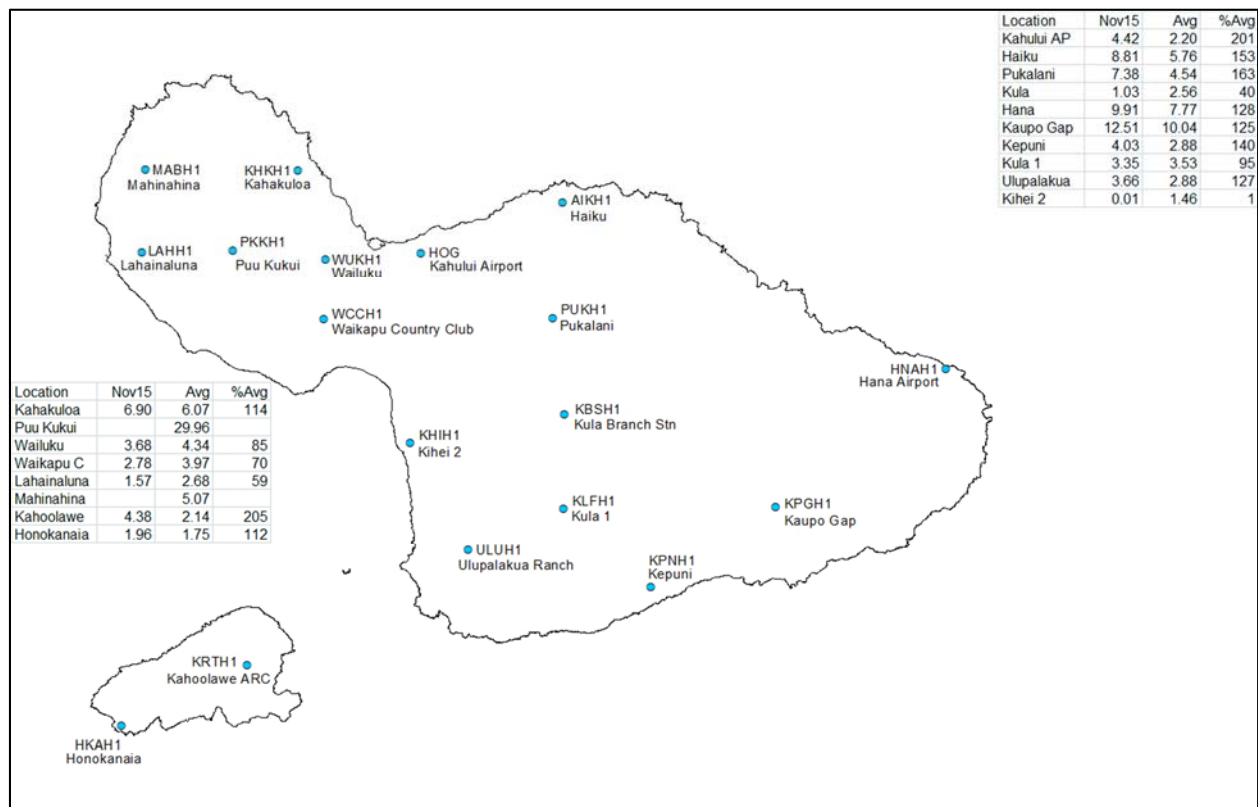


Figure 4-14 Regional precipitation from rain gauges on Maui for November 2015

Marine Species: No endangered or protected marine species were observed during the implementation of the project.

4.4 Maintenance Best Management Practices

All applicable practices within the approved Best Management Practices Plan were adhered to. In particular, these specific practices were important for protecting the environment and the public:

- Silt fence was placed at the base of the slope as the sand was pushed from west to east on the berm.
- All work was conducted above mean higher high water and above the swash zone.
- No equipment was operated in the swash zone.
- Project notification sign was posted at the County of Maui beach access and on the beach (Figure 4-15 and Figure 4-16).
- A permanent project sign has been placed at the mauka end of the County of Maui beach access, on the subject property's wall (Figure 4-17).

- The beach and nearshore waters were inspected prior to initiation of work and throughout the project to ensure that no protected marine species were within 50 yards of the project area.



Figure 4-15 Signage posting within the County of Maui beach access notifying the public of the maintenance activity



Figure 4-16 Close up of the signs posted on the beach and at the access during the project



Figure 4-17 Permanent placard mounted on the wall adjacent to the County of Maui beach access

5. ADAPTIVE MANAGEMENT PLAN DATA

5.1 Quality of Placed Material

5.1.1 Existing Beach Sand

The existing beach is a product of nearly two decades of maintenance activities conducted by the Association, during which time they have placed almost 30,000 cy of beach quality sand on the coastline. The ongoing efforts have reestablished and stabilized a sandy beach profile seaward and atop the existing erosion mitigation structure. Existing beach sand is a combination of native and fill material that have intermixed along the coastline.

Figure 5-1 is a graph of the sand samples collected within the swash zone, at the wet/dry line, on the upper beach face, and from the berm near the stairwell at the center of the project area's shoreline. The composite sample is a combination of all four of these samples. Also shown on the graph are the +/- 20% thresholds for the composite beach sand sample.

The composite sample of beach sand grains is normally sorted material within the range of coarse (1 mm) to very fine (0.125 mm) sand. The composite sample's median grain size is within the medium sand range, just smaller than 0.4 mm in diameter.

Figure 5-2 depicts the grain size fraction relationship between Sugar Cove's restored beach and Kanaha Beach, which is a native beach that is also located within Spartan Reef. The composite sample from Kanaha Beach fits within the +/-20% ranges of Sugar Cove's composite beach sand and is overlapping for median grain size. The similarity between the two samples further highlights the success of previous restoration efforts at Sugar Cove.

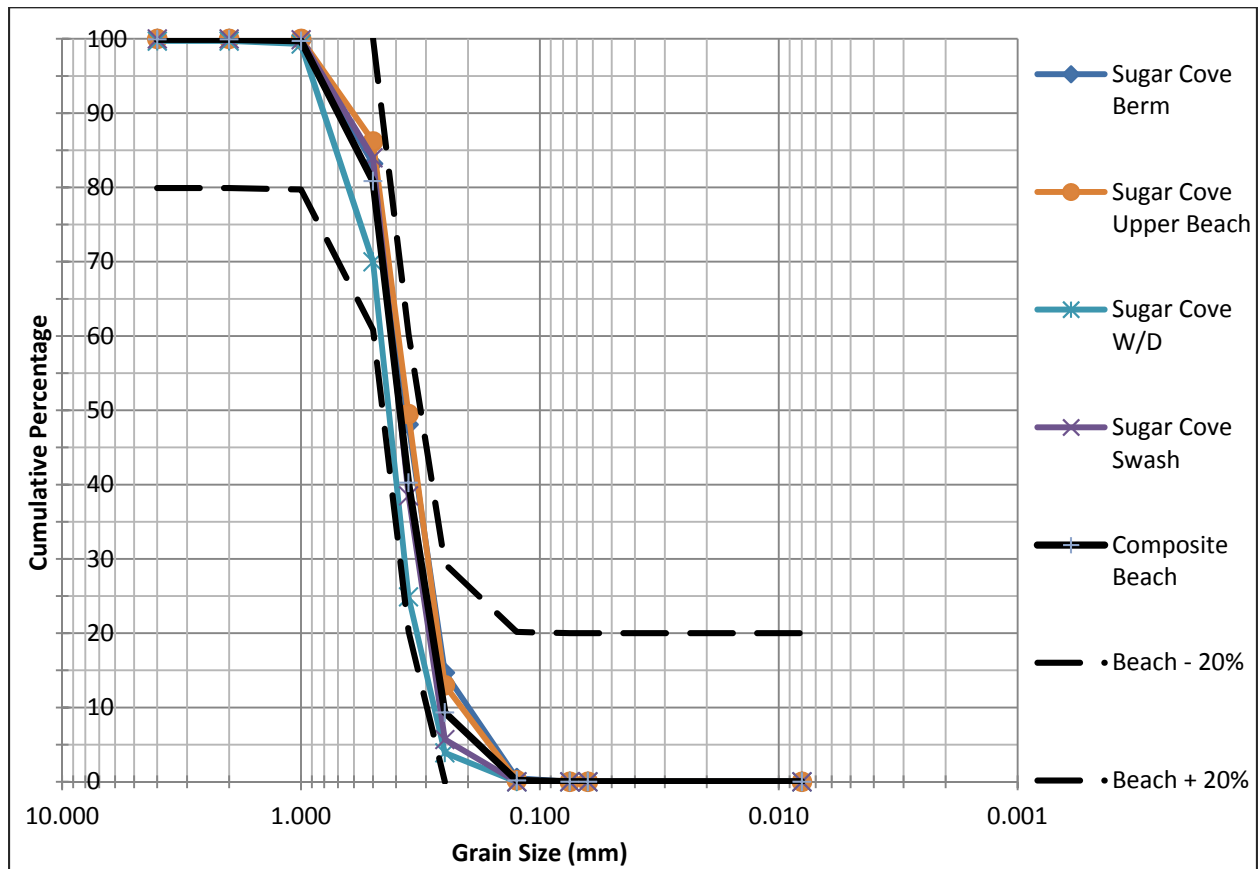


Figure 5-1 Grain size distribution for beach sand samples, composite beach sample, and the +/- 20% thresholds

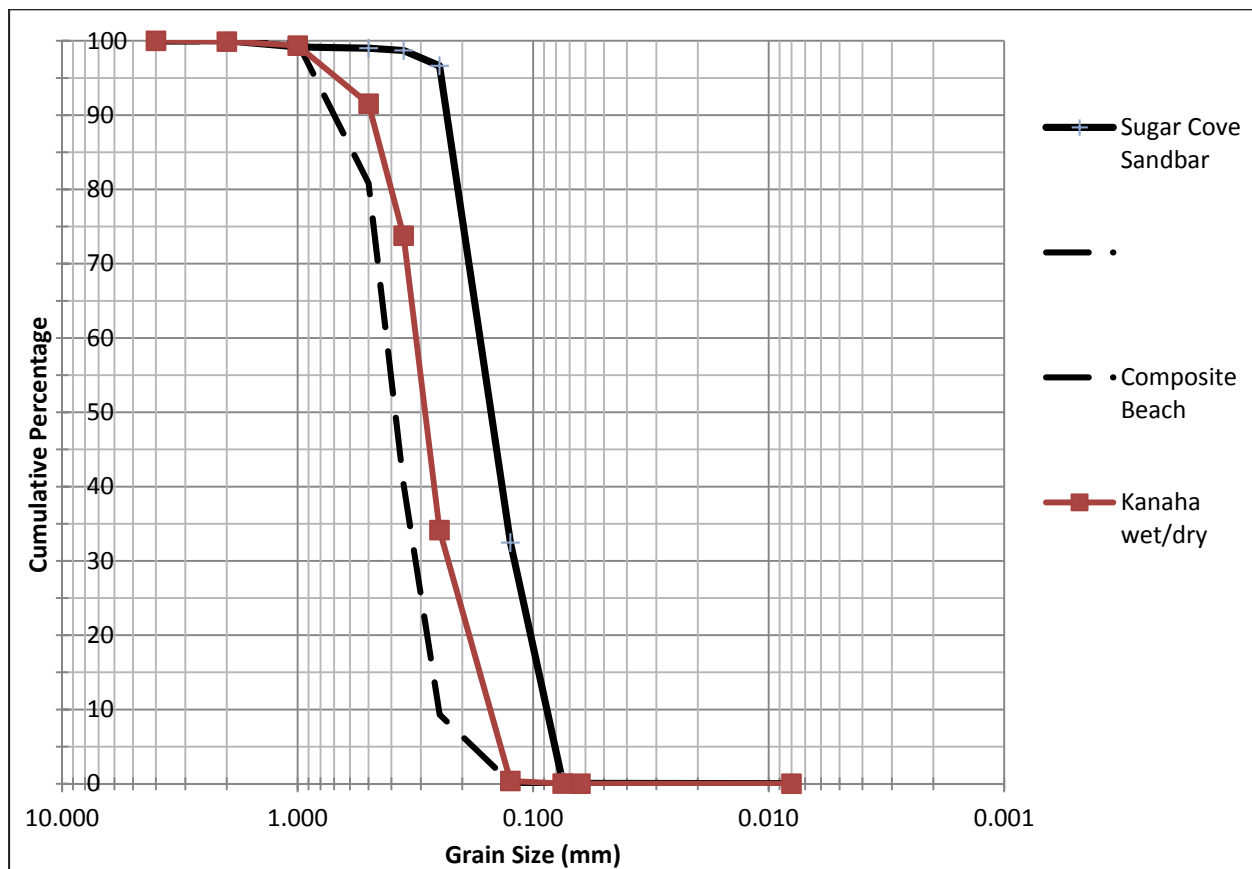


Figure 5-2 Grain size distribution for adjacent natural beach sand samples from Kanaha Beach, composite Sugar Cove beach sample, and the +/- 20% thresholds for Sugar Cove

5.1.2 Berm Maintenance Sand

Ameron Inland Dune Sand has been a consistent source of beach quality fill material on the island of Maui and was utilized in all the previous beach restoration efforts by the Association. This material has already been excavated, sorted, and stockpiled by Ameron.

This sand is light reddish brown in color and has a median grain size of 0.28 mm. 97.9% of the material is within the range of sand grain size, and 2.1% is silt size. This material is dominantly marine carbonate sediment in origin.



Berm fill is evaluated for compatibility using the standards outlined in the *Guidelines for SSBN Cat II General Application*.

Analysis shows the berm fill sand has less than 5%, by volume, sediment 0.125 mm or smaller. This is less than one-tenth of the 50%, by volume, threshold identified in the standards.

The berm fill sand does not fit entirely within the +/- 20% brackets around the composite existing beach sand sample (Figure 5-4). This may be a result of variation in the sieve sizes used for analysis of the sand samples. Regardless, the berm fill sample is finer in nature than the existing beach sand.

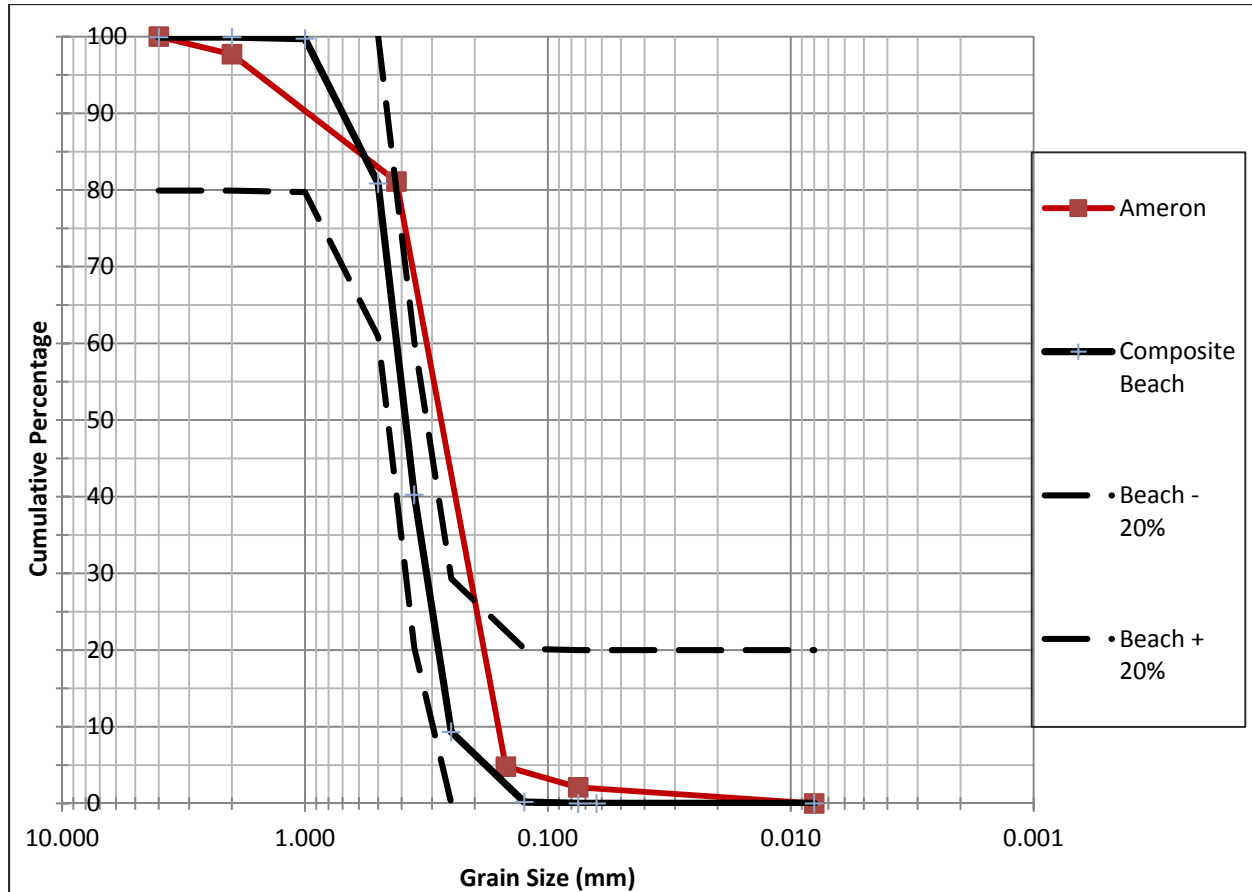


Figure 5-4 Grain size distribution for composite beach sample, the +/- 20% thresholds, and the berm fill sand sample

Table 5-1 shows the grain size distributions for the composite beach sample and the beach quality fill material supplied by Ameron.

Table 5-1 Grain size distributions for Sugar Cove existing beach and beach quality fill sand (Ameron)

size (mm)	4.000	2.000	1.000	0.500	0.420	0.355	0.250	0.149	0.125	0.075	0.063	0.008
Sugar Cove Beach	99.925	99.925	99.725	80.850		40.250	9.325		0.175	0.000	0.000	0.000
Ameron	100.000	97.700			81.10			4.8		2.100		0.000

Due to the finer sediment sizes of the berm fill sand, when compared to the composite beach sand samples, overfill analysis was conducted. This fulfills the requirement in the State's nourishment guidelines. Calculation of the overfill factor (Table 5-2 and Figure 5-5) indicates that maintenance efforts will need to use 126% more sand than the desired volume, due to losses associated with preferential winnowing of fines through normal littoral cell processes. The placed volume of 892 cy of material, after several years of assimilation in to the existing berm

through winnowing, leaves roughly 707 cy of sand on the berm. This is a similar volume to the previous restoration efforts that successfully restored and maintained the beach using the same sand source. Much of the finer material will be assimilated within the nearshore sand field and sand bar.

Table 5-2 Overfill calculations for the proposed berm fill sand

Parameter	Value
Mn	1.34
Mb	1.70
Sigma	0.98
Mb' - Mn'	0.36
Overfill Factor K	1.26

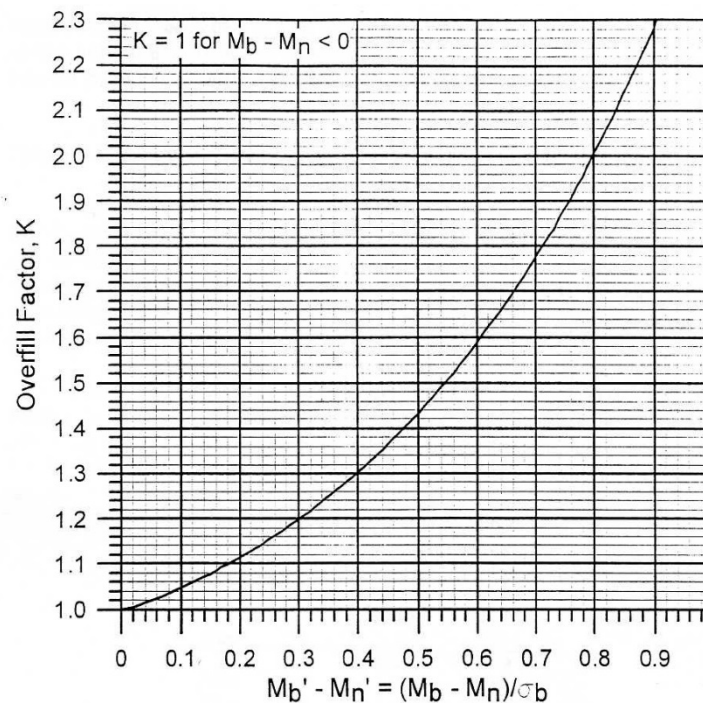


Figure 5-5 Overfill Factor conversion chart

The sediment has also been successfully used in all previous restoration efforts at the property. Use of this sediment has restored the beach, and maintained it for nearly two decades, returning it to a condition similar to its documented position and orientation in 1960. Restoration of the sand beach and nearshore sand field has also resulted in restoration of the nearshore and coastal ecosystems. These sand dominated environments have been revitalized with the use of Ameron dune sand. Moreover, the sediment meets all the requirements for a State Category II Small Scale Beach Nourishment application.

5.2 Coastal and Coastal and Marine Environmental Conditions

5.2.1 Photographic documentation

Photographs of nearshore waters, nearshore substrate characteristics, shoreline location, general beach, and backshore conditions were collected.

5.2.1.1 Nearshore Water Quality

Visual observations for water quality were collected periodically before, during, and after completion of the berm maintenance effort. Water quality in the nearshore, or between the shoreline and the reef crest offshore, varied significantly along the shoreline, however, offshore conditions beyond the reef crest appeared to be ubiquitous (Figure 5-6, Figure 5-7, and Figure 5-8). Offshore water quality was noticeably clearer directly offshore of the reef crest. Observations of the nearshore waters at Sugar Cove, Baldwin Beach, and Laulea (the western cove abutting Sugar Cove) are presented in Table 5-3.



Figure 5-6 Water quality conditions at Sugar Cove, 10:15 on November 09, 2015



Figure 5-7 Water quality conditions at Sugar Cove, 09:12 on November 10, 2015



Figure 5-8 Water quality conditions at Sugar Cove, 14:48 on November 10, 2015

Table 5-3 Water quality observations during maintenance efforts.



Date - Time	Sugar Cove Nearshore	Baldwin Beach Nearshore	Laulea Nearshore
2015/11/09 - 0700	Turbid waters, varied from milky to light red shades	Very turbid water with milky coloring, extending alongshore toward Sugar Cove	Very turbid water with red plumes in milky waters, plumes not connected to Sugar Cove
2015/11/09 - 1130	Turbid waters, varied from milky to light red shades	Very turbid water with milky coloring, extending alongshore toward Sugar Cove	Turbidity decreasing with lesser red plumes in milky waters, plumes not connected to Sugar Cove
2015/11/09 – 1630	Same condition as mid-day		
2015/11/10 – 0700	Water quality improved at all three sites with decreased wave frequency and lighter winds overnight.		
2015/11/10 – 0915	Turbid waters, varied from milky to light red shades. Milky waters moving west from Baldwin Beach area.	Very turbid water with milky coloring, extending alongshore toward Sugar Cove	Turbid water with red plumes in milky white nearshore waters. The Plumes are not connected to Sugar Cove.
2015/11/10 – 1430	Same condition as mid-morning		

5.2.1.2 Marine Benthic Conditions

High waves for several days prior to placement and continued two to four foot wave conditions in the nearshore during placement resulted in visibility between one to three feet during maintenance efforts. No photographs were collected immediately before, during, or after the maintenance effort due to poor visibility. Photographs collected during the planning phase of the project are presented below (Figure 5-9 to Figure 5-14), as indicative of general conditions within the cove. The cove has a restored nearshore sand field between the western rocky headland and the eastern seawalls. Outside of the cove a fossil carbonate pavement is emergent and covered with turf algae. The pavement is the dominant bottom type seaward of the cove, with a sand filled channel extending from the nearshore sand fields to the reef crest. There are no live corals in the area near the cove.

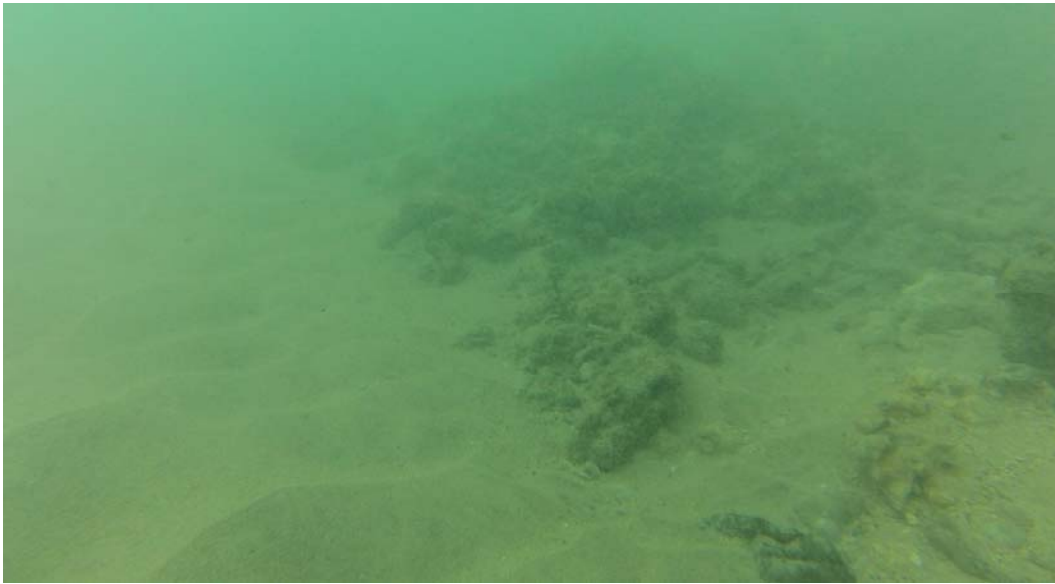


Figure 5-9 Sand and pavement substrates typical of the central area within the cove



Figure 5-10 Sand substrate typical of the sand bar and nearshore sand field



Figure 5-11 Nearshore sand from the sand bar is beach quality material similar to the restored beach sand

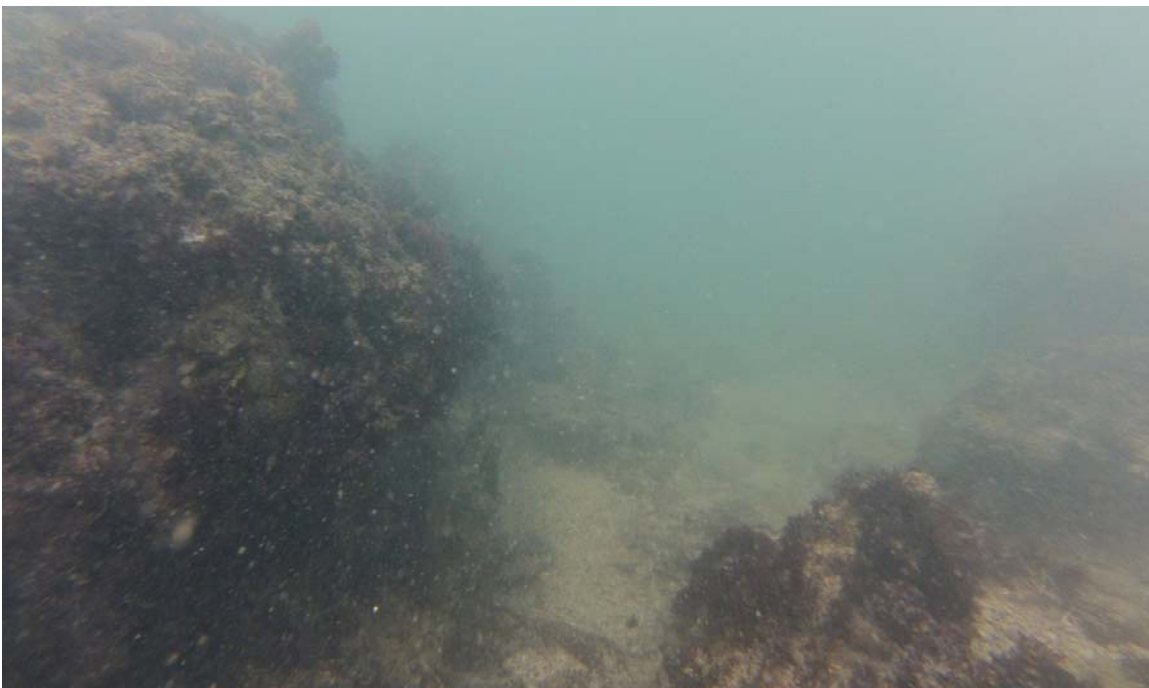


Figure 5-12 Turf algae and hard bottom typical of the eastern portion of the cove



Figure 5-13 Turf algae, hard bottom, and cobble typical of offshore of the center of the cove



Figure 5-14 Turf algae, hard bottom, and boulders typical of the western side of the cove

5.2.1.3 Shoreline Conditions

Shoreline conditions, along the mauka side of the beach berm, showed signs of heavy erosion. The erosion scarp was three to four feet tall along the western half of the Hayashi seawall. The eastern half of the seawall's upper boulders was entirely exposed due to beach deflation.



Figure 5-15 Pre-maintenance conditions near Transect 7 (right picture) and Transect 5 (left picture)



Figure 5-16 Pre-maintenance conditions near Transect 3 (right picture) and the County of Maui beach access (left picture)

Post-maintenance the shoreline on the western two-thirds of the beach was stabilized by the berm-maintenance materials (Figure 5-17 and Figure 5-18). The maintenance sand elevated the berm along the western portion of the cove.



Figure 5-17 Post-maintenance conditions on the berm at Transect 5



Figure 5-18 Post-maintenance conditions on the berm looking toward Transect 3 from the west

5.2.1.4 General Beach Conditions

Pre-maintenance the beach showed signs of deflation (Figure 5-19 and Figure 5-20), which has occurred during the four years since the previous berm maintenance efforts. The low profile beach face was awash during higher tides. There was a recent debris line mid-face on the beach prior to initiating berm maintenance.



Figure 5-19 Looking makai along Transect 7 (left picture) and Transect 5 (right picture), pre-maintenance



Figure 5-20 T Looking makai along Transect 3 (left picture) and the County of Maui beach access (right picture), pre-maintenance

Post-maintenance the beach face was still deflated; however, the western two-thirds of the berm was re-inflated with maintenance sand, which abutted the upper portion of the Hayashi seawall (Figure 5-21).



Figure 5-21 Looking east along the beach face, from Transect 7 toward the County of Maui beach access

5.2.1.5 Backshore Conditions



Figure 5-22 Typical backshore conditions at the site

Backshore conditions at the project are typified by a coastal lawn bordered by a naupaka hedge on the makai side. The Hayashi seawall is located beneath and makai of the naupaka hedge, extending seaward beneath the restored sand beach. Dwellings are built in the coastal lawn, adjacent to the mauka side of the Hayashi seawall.

5.2.2 Water Quality Data

Water quality was assessed at three locations at the beginning and end of the berm maintenance project. A Hach 2100Q Turbidimeter was used for the testing. The turbidimeter was calibrated prior to operation, on November 08, 2015, with a standard set.

Water quality results, as presented in Table 5-4 and Table 5-5, are reflective of changes in wave energy, rain, and regional turbidity as observed during the project. Lower turbidity readings were recorded at both Sugar Cove and Baldwin Beach following the berm maintenance activity, indicating a regional decrease likely associated with decreasing winds and waves during the sampling period. It is unknown why there was an increase in turbidity at the Sprecklesville control site during the project.

Table 5-4 Water Quality Testing Results: November 09, 2015, at 07:45

Location	Turbidity (NTU) (average of 3 readings)
Sugar Cove	5.28
Baldwin Beach	7.12
Sprecklesville	8.95

Table 5-5 Water Quality Testing Results: November 10, 2015, at 14:00

Location	Turbidity (NTU) (average of 3 readings)
Sugar Cove	2.64
Baldwin Beach	4.96
Sprecklesville	10.96

5.3 Beach Profile Adjustments

Profiles and topographic data were collected immediately before and after berm maintenance efforts. Data were collected in the morning on November 09, 2015, prior to sand placement (Figure 5-23), and again in the afternoon on November 10, 2015, immediately following sand placement (Figure 5-24). Representative profiles are presented for station 4 + 00 (Figure 5-25) through station 8 + 00 (Figure 5-33). Station 4 + 00, station 6 + 00, and station 7 + 50 are representative of Transect 7, Transect 5, and Transect 3, respectively.

Berm maintenance sand was placed along a nearly 300 foot length of beach, between approximately 3 + 25 to approximately 7 + 25. Placement grades are visible in the profile data presented below, and represent 892 cubic yards of material placed during the maintenance operation. The base of placed material was at elevations greater than +5 feet at all locations, and had crest elevations around +12 feet, in conformance with the placement plan.

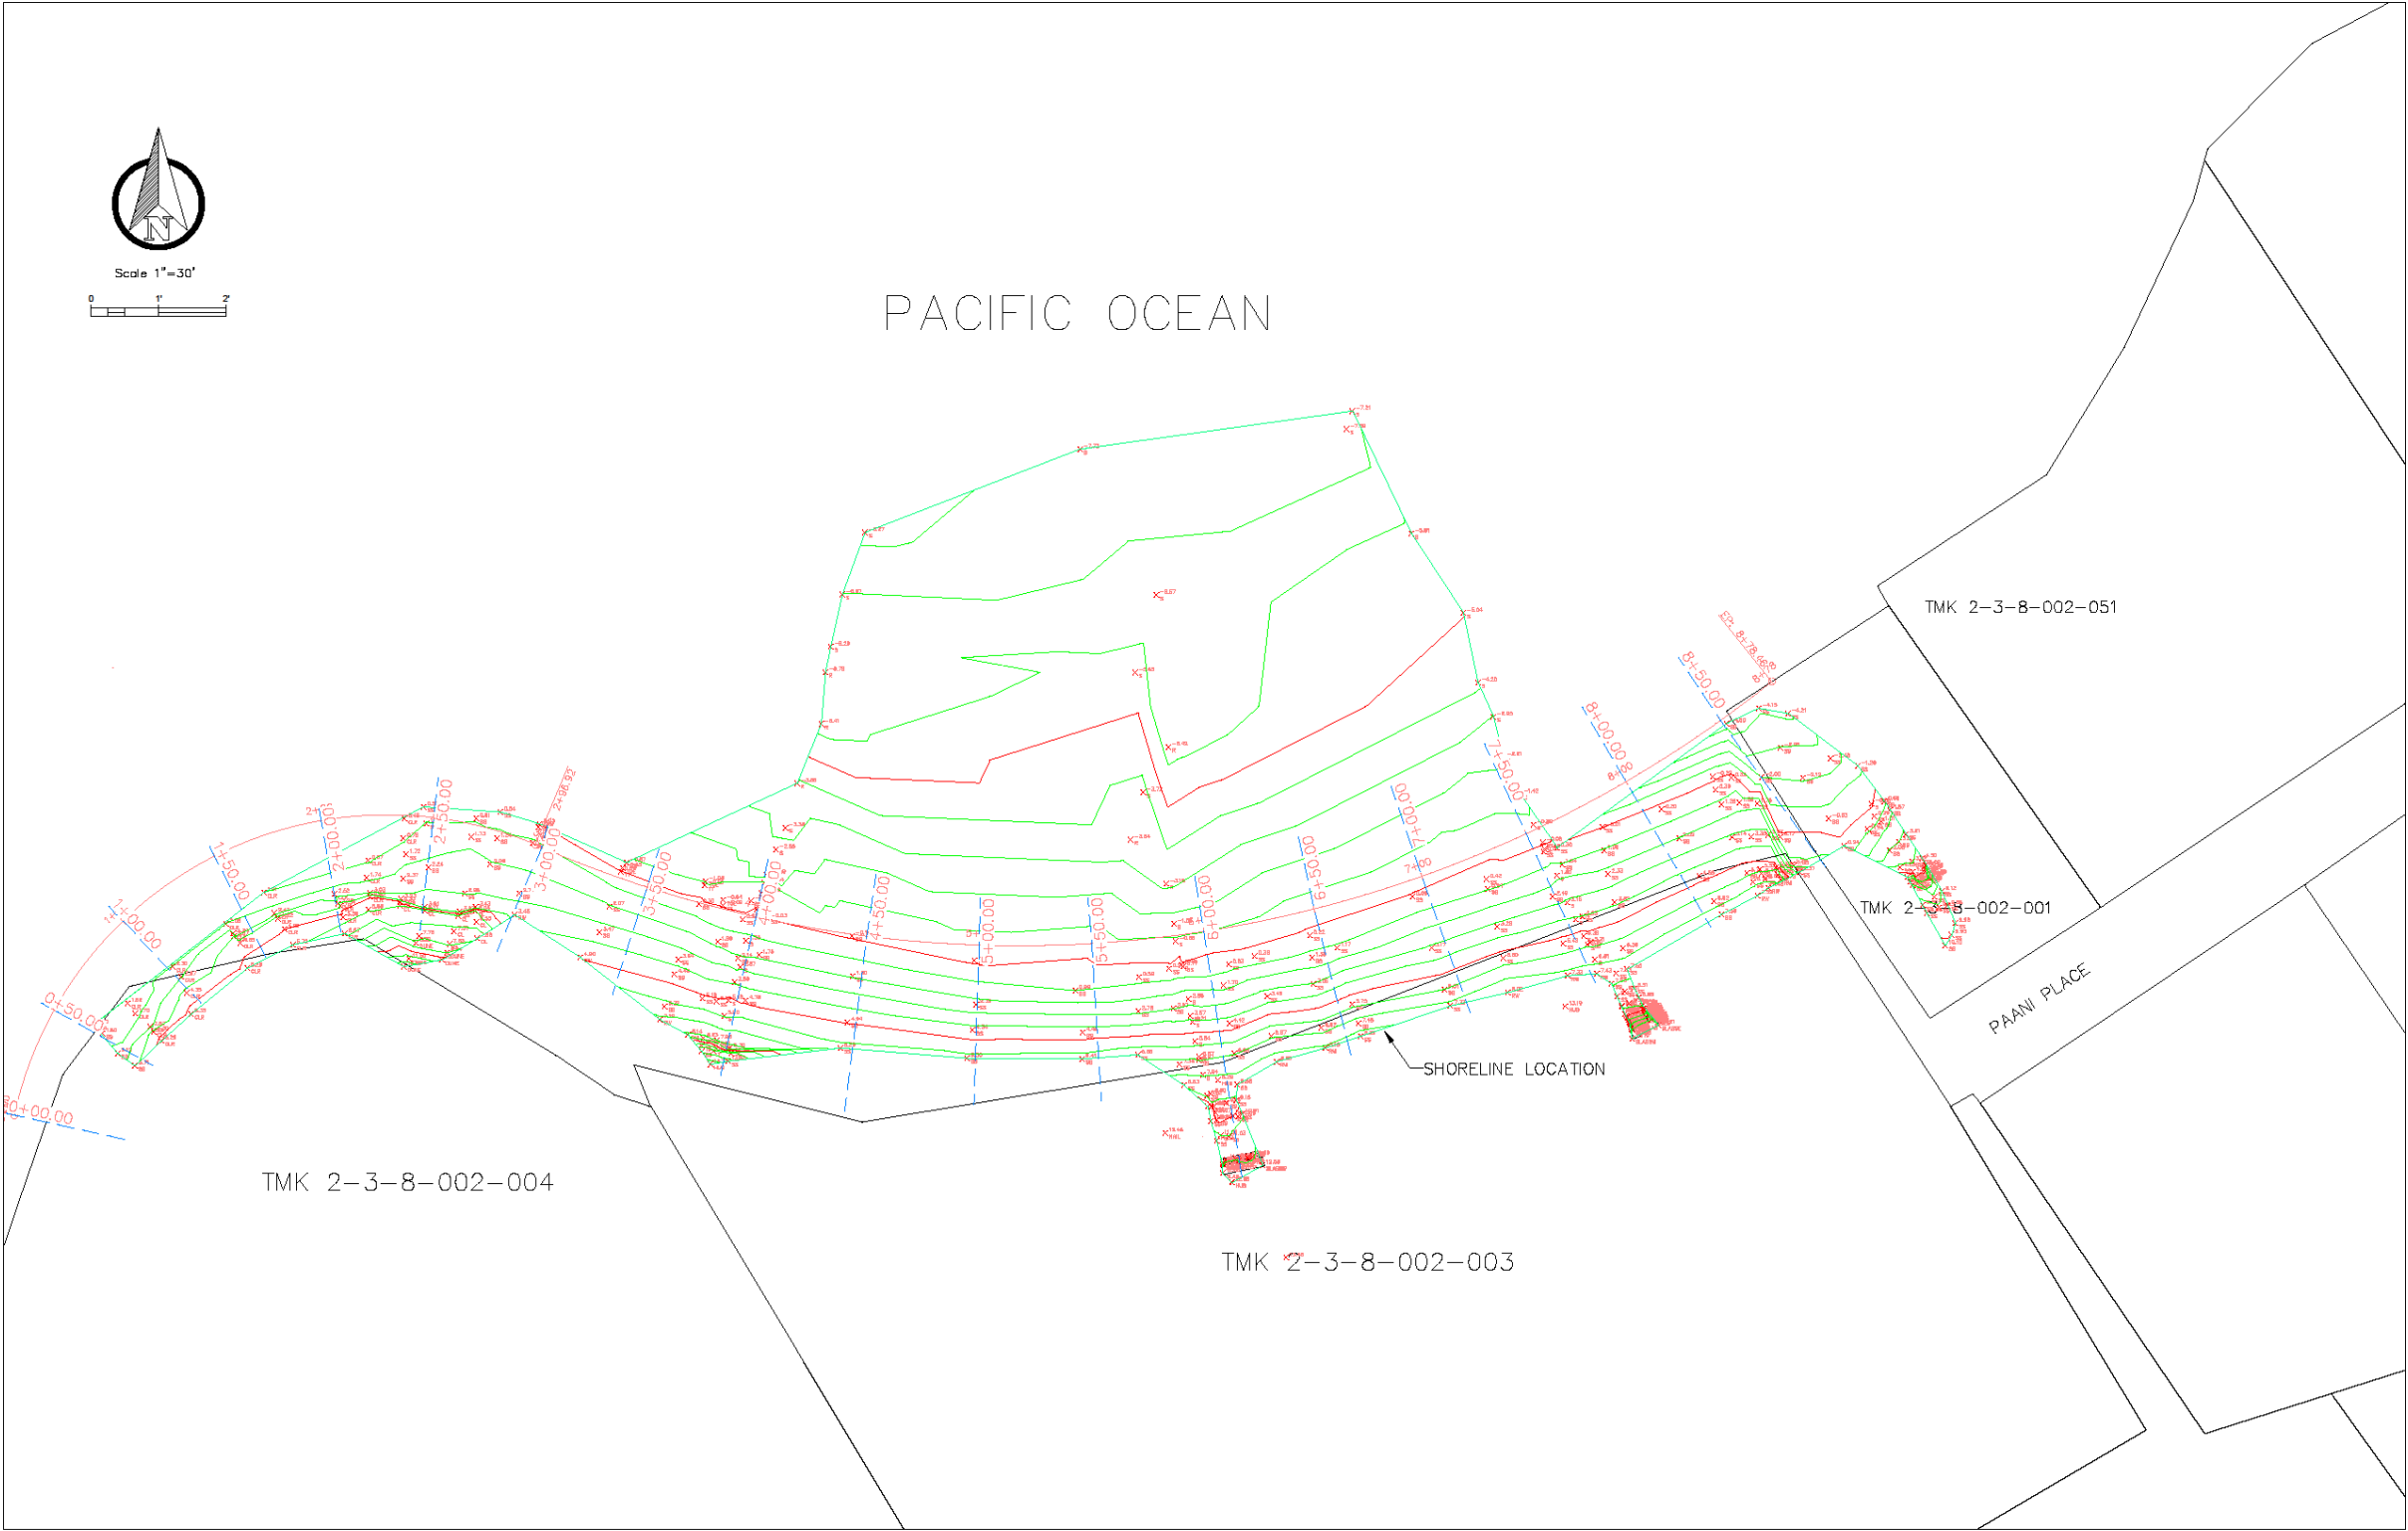


Figure 5-23 November 09, 2015 conditions prior to initiating berm maintenance.

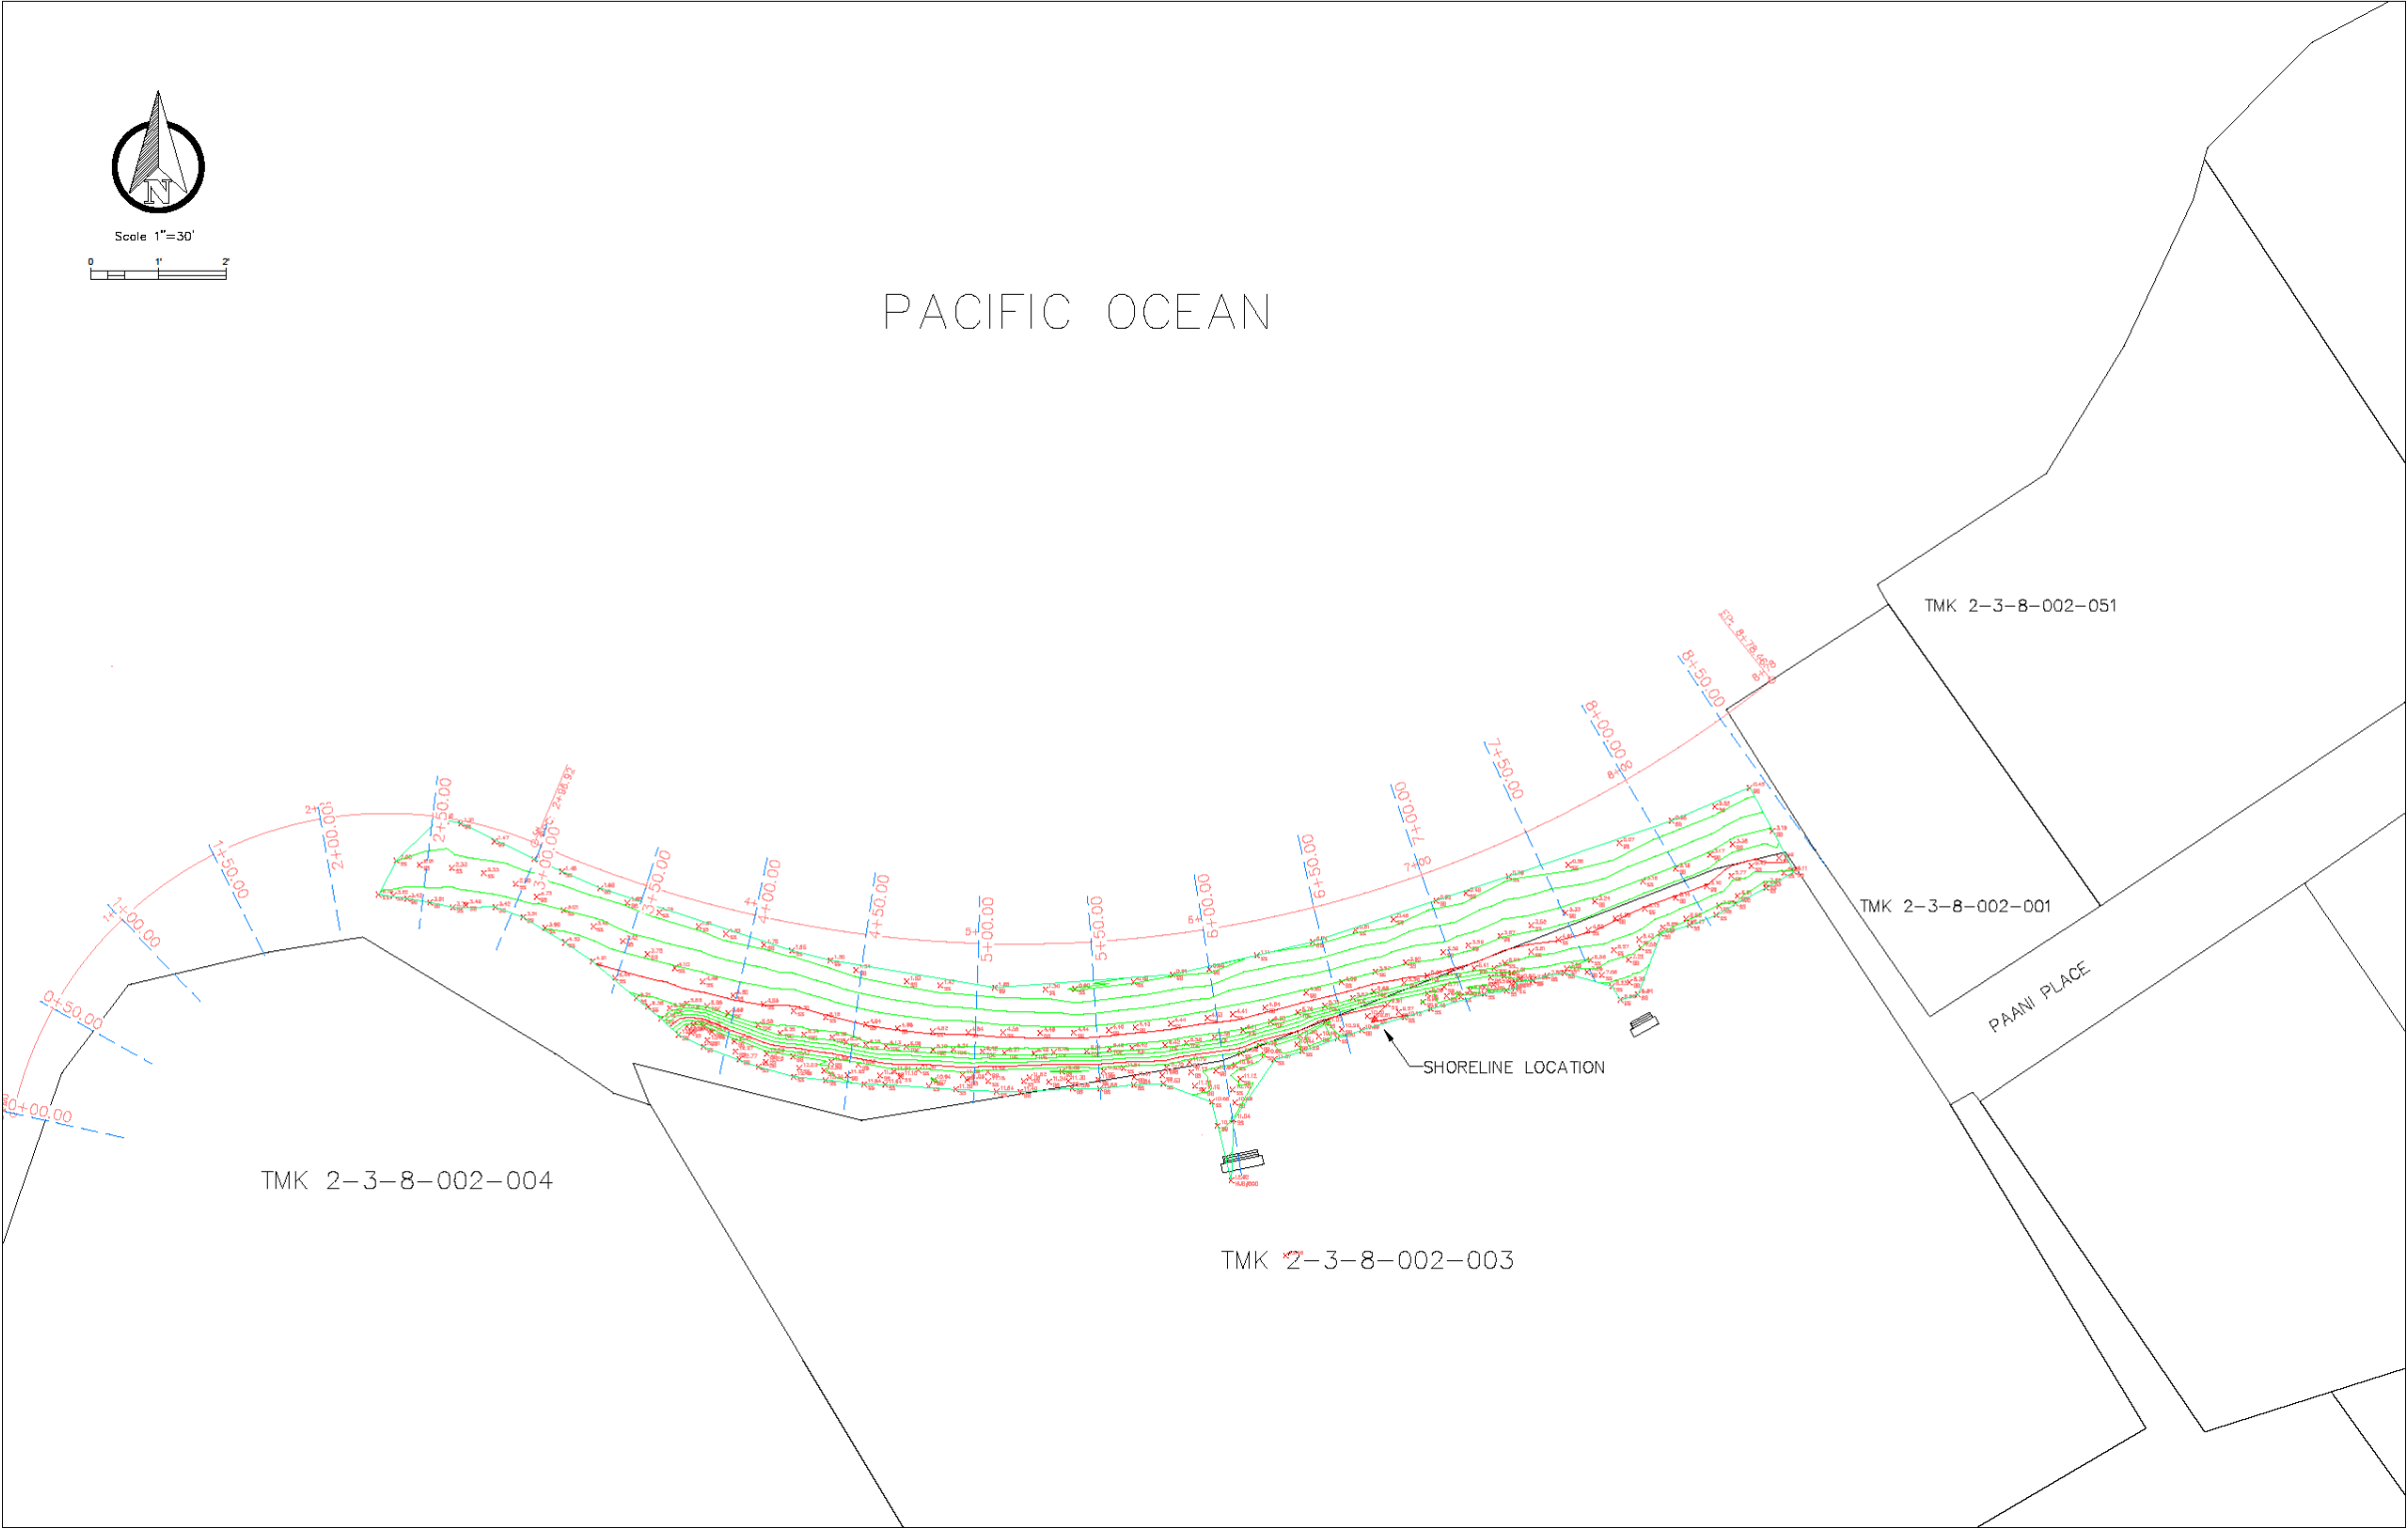


Figure 5-24 November 10, 2015 conditions immediately following berm maintenance

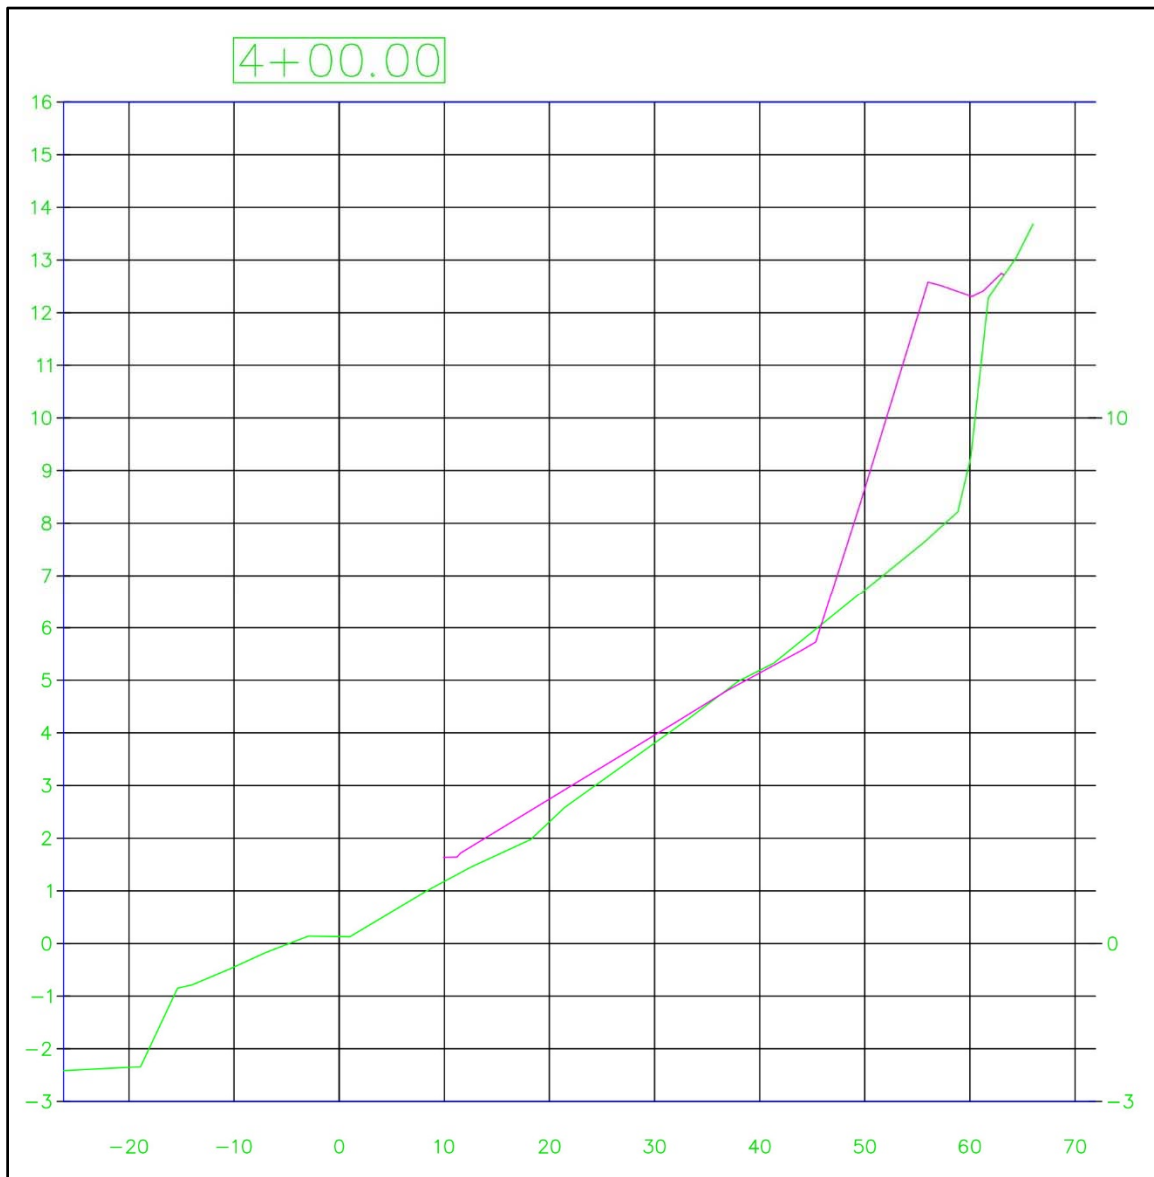


Figure 5-25 Profile 4 + 00. Green and pink lines represent November 09, 2015, and November 10, 2015, elevations respectively.

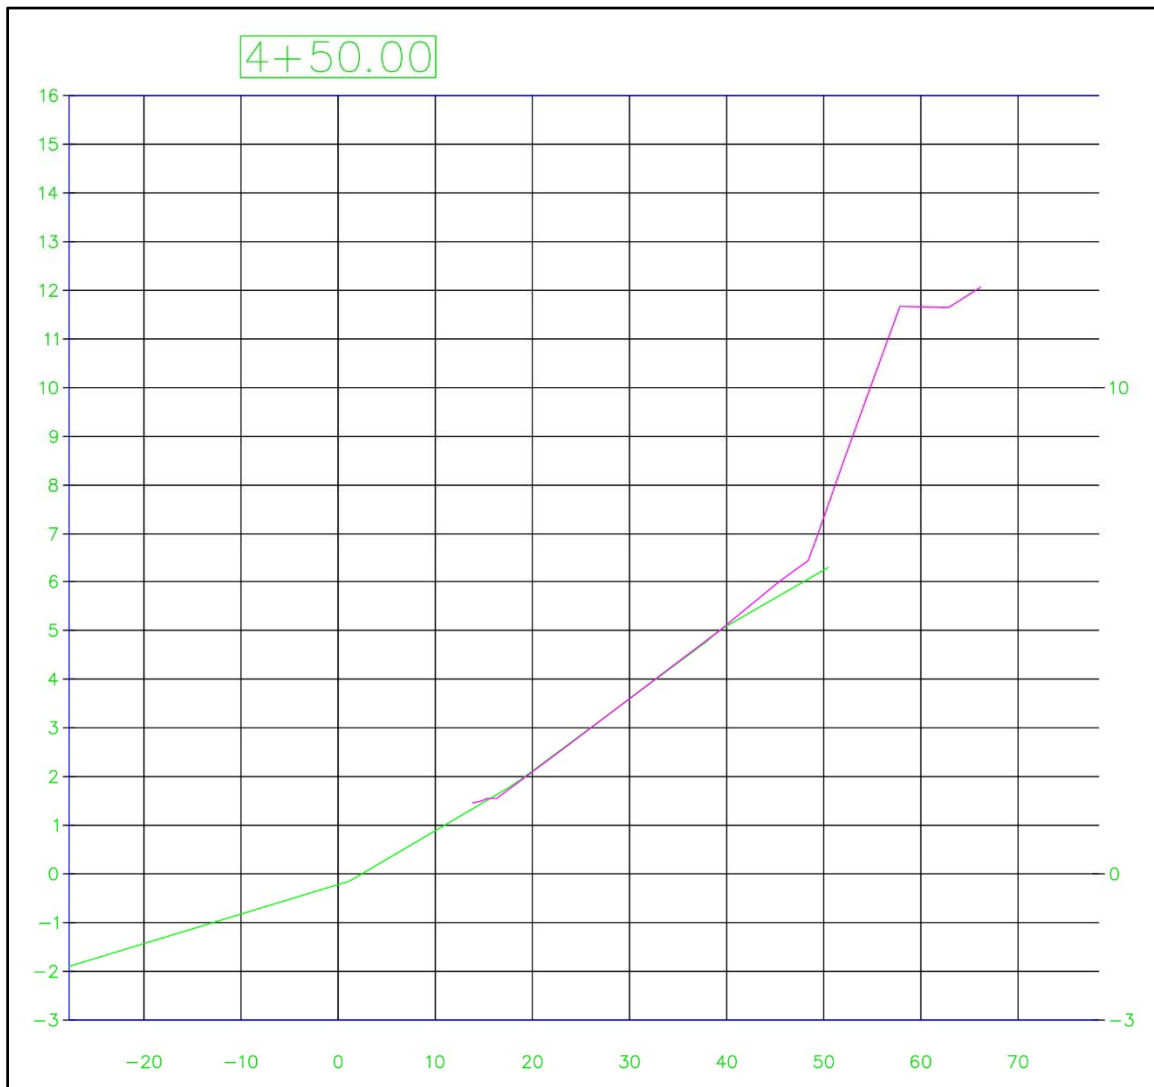


Figure 5-26 Profile 4 + 50. Green and pink lines represent November 09, 2015, and November 10, 2015, elevations respectively.

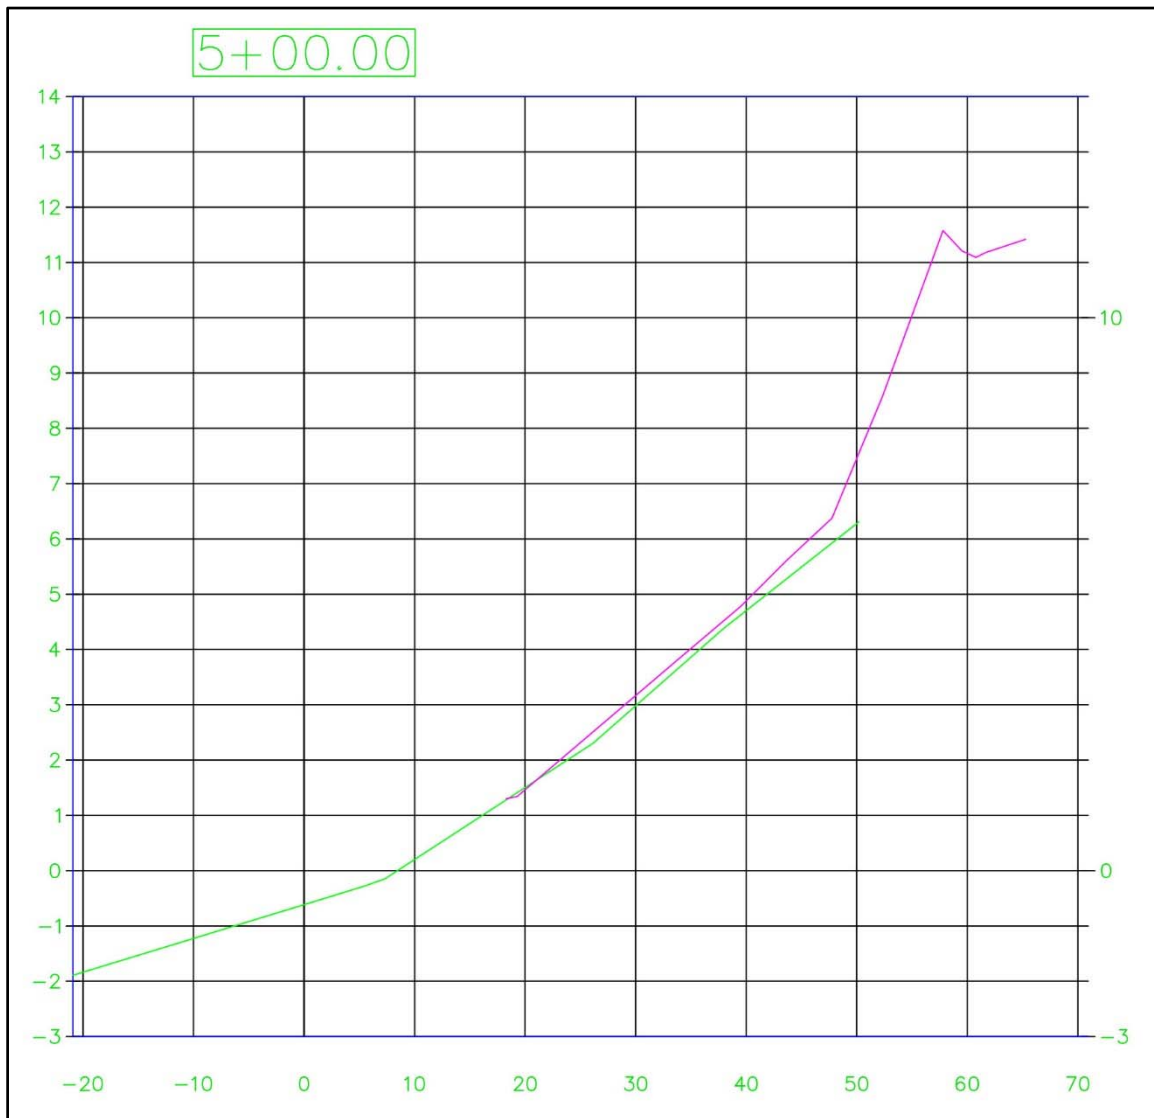


Figure 5-27 Profile 5 + 00. Green and pink lines represent November 09, 2015, and November 10, 2015, elevations respectively.

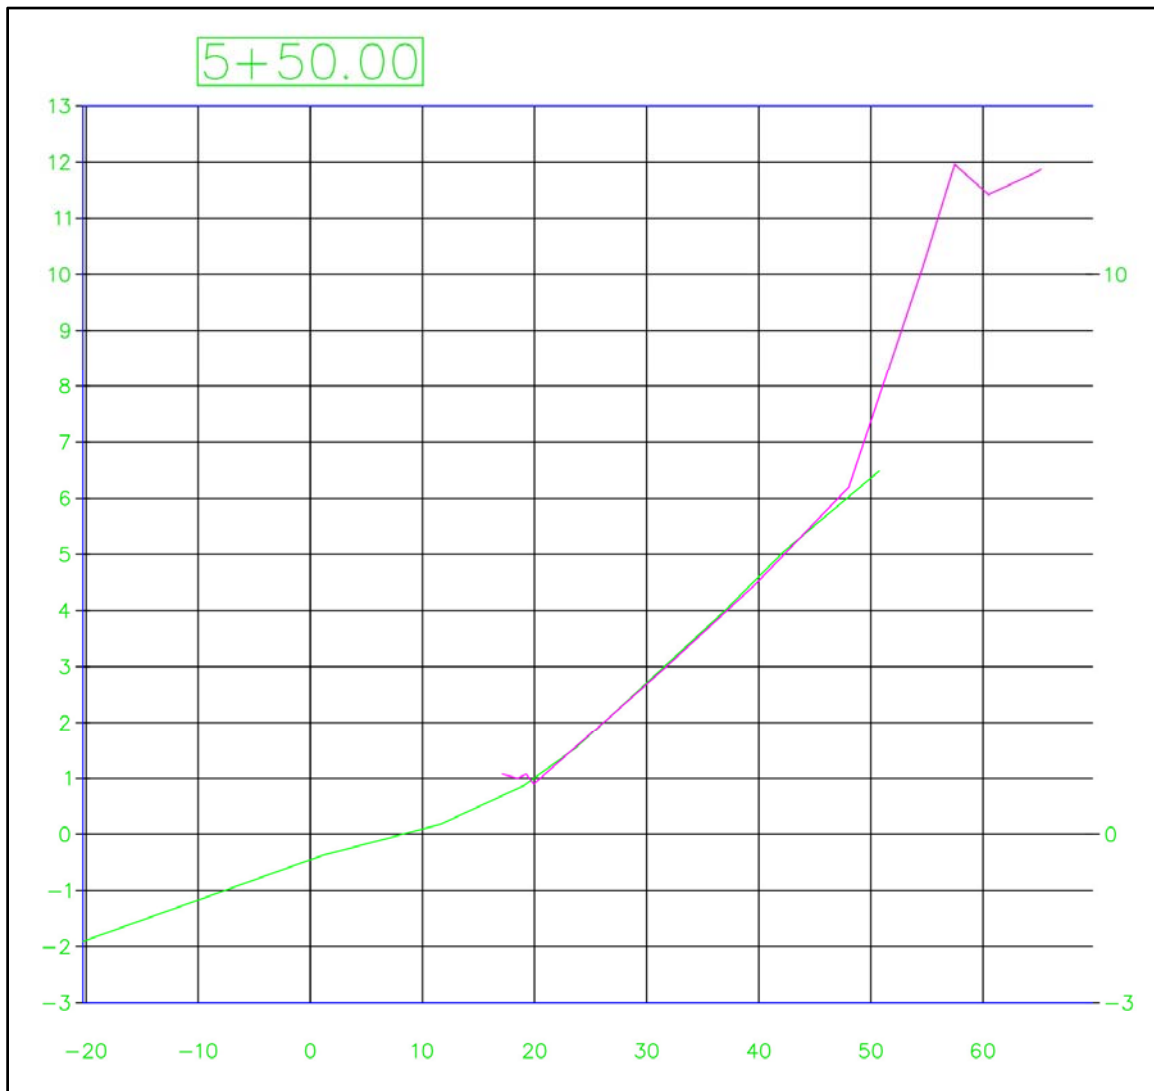


Figure 5-28 Profile 5 + 50. Green and pink lines represent November 09, 2015, and November 10, 2015, elevations respectively.

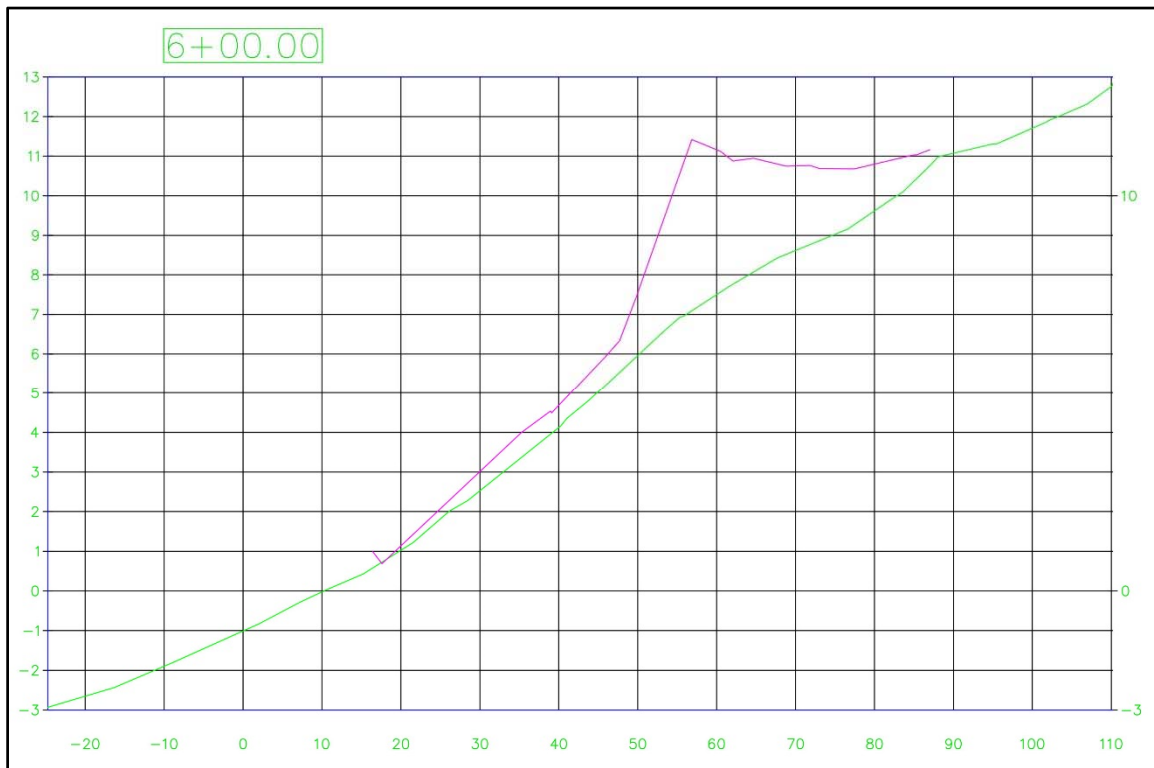


Figure 5-29 Profile 6 + 00. Green and pink lines represent November 09, 2015, and November 10, 2015, elevations respectively.

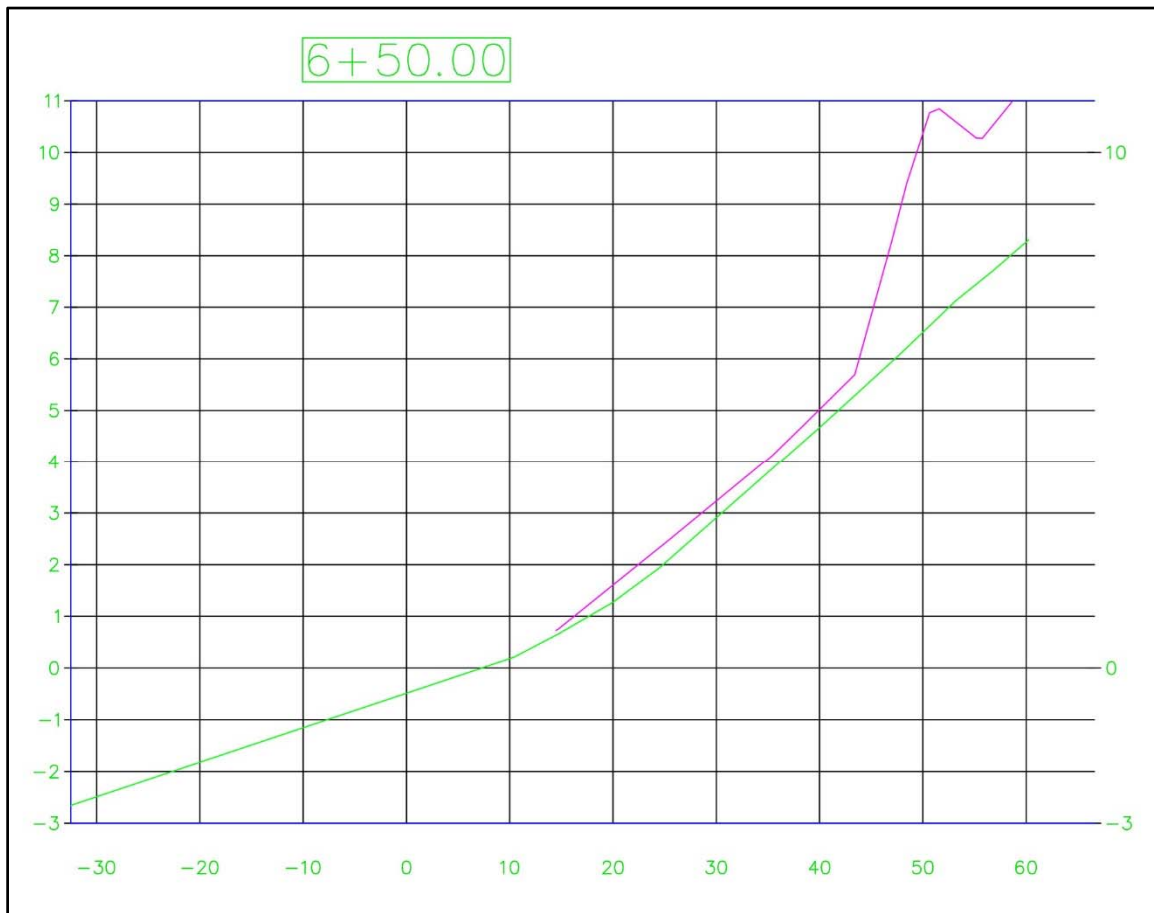


Figure 5-30 Profile 6 + 50. Green and pink lines represent November 09, 2015, and November 10, 2015, elevations respectively.

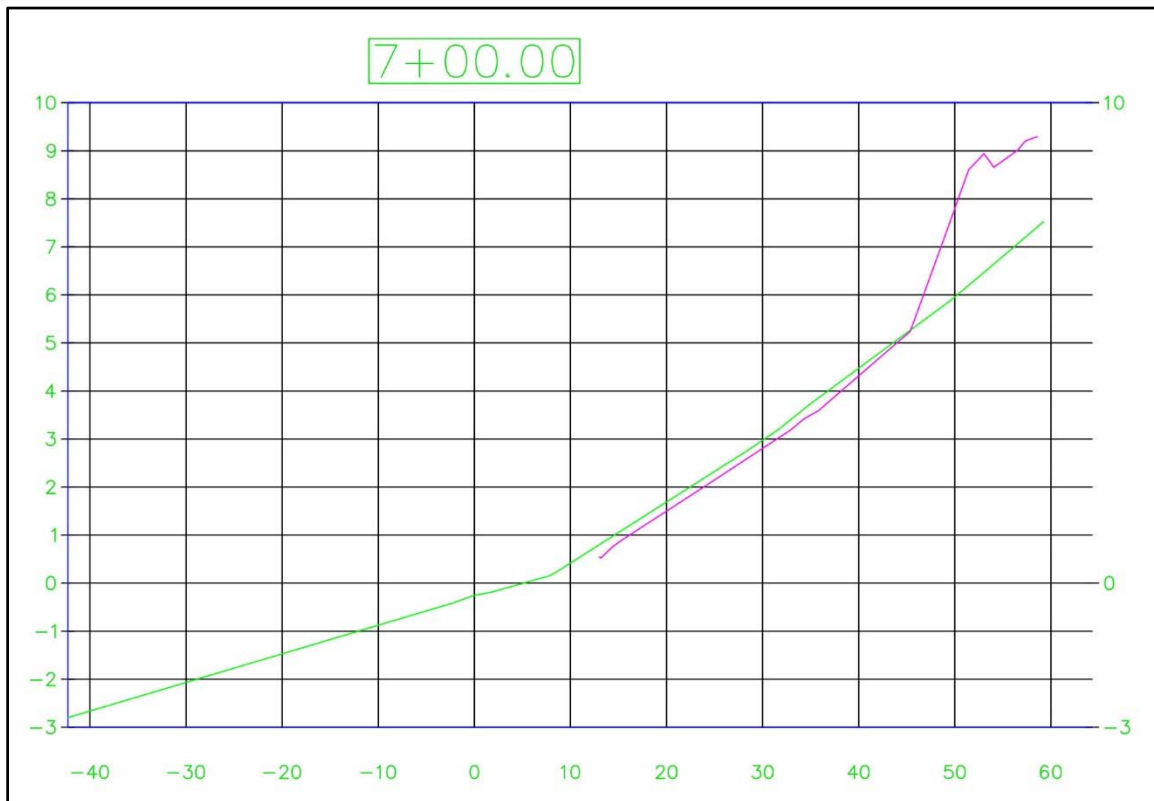


Figure 5-31 Profile 7 + 00. Green and pink lines represent November 09, 2015, and November 10, 2015, elevations respectively.



Figure 5-32 Profile 7 + 50. Green and pink lines represent November 09, 2015, and November 10, 2015, elevations respectively.

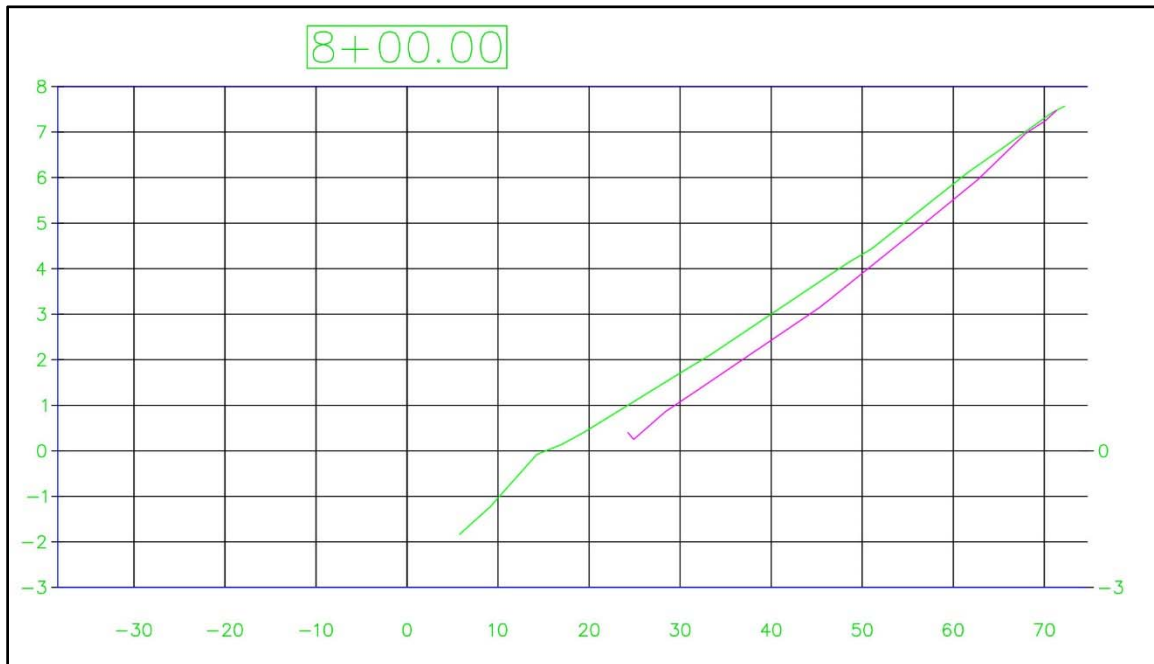


Figure 5-33 Profile 8 + 00. Green and pink lines represent November 09, 2015, and November 10, 2015, elevations respectively.

Berm maintenance material was heavily attacked during the consequent winter months by exceptionally large and frequent wave events associated with the 2015 – 2016 El Nino. Each of these profiles is currently showing signs of deflation.

5.4 Maintenance Activity Lifecycle

Based on 20 years of profile and volume records from previous berm and beach maintenance efforts, there was significant evidence indicating that small efforts of roughly 1,000 cy would maintain the berm for approximately 2 years.

This winter's El Nino is one of the strongest on record, and has resulted in very large Pacific swells reaching the Hawaiian shorelines. The 1997-1998 El Nino, previously the strongest El Nino on record, also impacted the shoreline during early beach maintenance efforts. Records show that during and after that El Nino ongoing maintenance efforts were required. Between the fall of 1997 and spring of 1999 almost 10,000 cy of sand was placed at the site to keep the beach stable.

The plan acknowledges extreme events, such as tsunamis, hurricane, and meso-scale eddy, can severely impact the lifecycle of maintenance efforts at Sugar Cove. Given the severe nature of the ongoing El Nino, there is a valid expectation that more frequent and possibly larger maintenance efforts will be required in the coming seasons.



5.5 Effectiveness of Material Placement

Photo documentation presented in 5.2.1 Photographic Documentation depicts the conditions before and immediately after placement of berm maintenance sand. The only change in conditions on the beach was in the area where sand was placed. The berm in this area was elevated by the placed sand. The berm maintenance effort restored elevations along the western two-thirds of the beach berm and within the County of Maui beach access path. Both the berm and the access path were being utilized by members of the public upon completion of placement activities.

6. BEST MANAGEMENT PRACTICES PLAN

The Best Management Practices Plan (BMPP), as approved by both County of Maui and State of Hawaii permits, was utilized to ensure that adequate protective measures are in place during regular beach maintenance of Sugar Cove, Sprecklesville, Maui, Hawaii. This plan was designed to prevent, if possible, or minimize adverse impacts to the environment. The project specifications required the Construction Contractor to adhere to environmental protection measures, including, but not limited to, those included in this plan.

6.1 General

This section covers the requirements of environmental and pollution control during construction activities. The Contractor shall be responsible for conformance to Title 11, Chapter 60 of the Public Health Regulations, Department of Health, State of Hawaii.

1. With the exception of those measures set forth elsewhere in this plan, environmental protection shall consist of the prevention of environmental pollution as the result of construction operations under this project. For the purpose of this plan, environmental pollution is defined as the presence of chemical, physical, or biological elements or agents which adversely affect human health or welfare, unfavorably alter ecological balances of importance to human life, affect other species of importance to man, or degrade the utilization of the environment for aesthetic and recreational purposes.
2. The work shall include the following:
 - A. Make sure that all permits required for this plan are obtained and valid for the construction period.
 - B. Provide all facilities, equipment and structural controls for minimizing adverse impacts upon the environment during the construction period.
3. Applicable Regulations: In order to provide for abatement and control of environmental pollution arising from the construction activities of the Contractor and his subcontractors in the performance of the work performed shall comply with the intent of the applicable Federal, State, and local laws and regulations concerning environmental pollution control and abatement, including, but not limited to the following regulations:
 - A. State of Hawaii, Department of Health, Administrative Rules, Chapter 55, WATER POLLUTION CONTROL: Chapter 54, WATER QUALITY STANDARDS.
 - B. State of Hawaii, Department of Health, Administrative Rules, Chapter 59, AMBIENT AIR QUALITY: Chapter 60, AIR POLLUTION CONTROL LAW.
 - C. State of Hawaii, Department of Health, Administrative Rules, Chapter 44A, VEHICULAR NOISE CONTROL.



- D. State of Hawaii, Occupational Safety and Health Standards, Title 12, Department of Labor and Industrial Relations, Subtitle 8, Division of Occupational Safety and Health, Subparagraph 12-202-13, ASBESTOS DUST: Environmental Protection Agency, Code of Federal Regulations Title 40, Part 61 Subpart A, NATIONAL EMISSION STANDARDS FOR AIR POLLUTANTS and Subpart B, NATIONAL EMISSION STANDARDS FOR ASBESTOS; and U.S. Department of Labor Occupational Safety and Health Administration (OSHA) Asbestos Regulations, Code of Federal Regulations Title 29, Part 1910.

6.2 Suitable Material

1. All maintenance equipment and material shall be free of contaminants of any kind including: excessive silt, sludge, anoxic or decaying organic matter, clay, dirt, oil, floating debris, grease or foam or any other pollutant that would produce an undesirable condition to the beach or water quality.
2. All berm fill sand shall be free from any objectionable sludge, oil, grease, scum, excessive silt, organic material or other floating material.

6.3 Historic or Cultural Features

1. No adverse impacts to any historical or cultural feature are expected, since the project is located on beach fill material, made of processed and well sorted carbonate sediment, sitting atop the beachwall.
2. Should any unanticipated archaeological site(s), such as walls, platforms, pavements and mounds, or remains such as artifacts, burials, concentrations of charcoal or shells be uncovered by the work activity, all work shall cease in the immediate area and the contractor shall notify the State Historic Preservation Office at 808.692.8015. No work shall resume until the owner/contractor obtains clearance from the Historic Preservation Office.

6.4 Environmental Protection

1. All permits and clearances shall be obtained prior to the start of any maintenance activities. The Contractor and his sub-contractors shall ensure that all construction work complies with all permit conditions and commitments made with environmental agencies.
2. The Contractor shall perform the work in a manner that minimizes environmental pollution and damage as a result of construction operations. The environmental resources within the project boundaries and those affected outside the limits of permanent work shall be protected during the entire duration of the maintenance activities.
3. The contractor shall complete daily inspection of equipment for conditions that could cause spills or leaks; clean equipment prior to operation near the water; properly site storage, refueling, and servicing sites; and implement spill response procedures and stormy weather preparation plans.



4. The project shall be completed in accordance with all applicable State and County health and safety regulations.
5. The Contractor shall provide notifications to the National Marine Fisheries Services, 808.944.2200, including the Protected Resources Division, at least 72 hours prior to scheduled start of maintenance activities.

6.5 Solid Waste and Disposal

1. Any maintenance activity related debris that may pose an entanglement hazard to marine protected species must be removed from the project site if not actively being used and/or at the conclusion of the maintenance activity.
2. The Contractor shall not dispose of any concrete, steel, wood, and any other debris into lagoon waters. Any debris that falls into the water shall be removed at the Contractor's own expense.
3. No contamination (trash or debris disposal, alien species introductions, etc.) of marine (reef flats, lagoons, open oceans, etc.) environments adjacent to the project site shall result from project related activities.
4. The Contractor shall remove all floating or submerged materials and/or debris at the end of each day, with the exception of any silt containment devices, as needed.
5. The Contractor shall ensure that an Oil Spill Response Plan is in place which shall detail procedures for managing the accidental release of petroleum products to the aquatic environment during construction. Absorbent pads, containment booms and skimmers will be available to facilitate the cleanup of petroleum spills.
6. Any spills or other contaminations shall be immediately reported to the DOH Clean Water Branch (808-586-4309).
7. In the event that floating hydrocarbon (oil, gas) products are observed, the Contractor or his designated individual will be responsible for directing that in-water work be halted so that appropriate corrective measures are taken in accordance with the Oil Spill Response Plan. The Department of Land and Natural Resources shall be notified as soon as practicable, and the activity causing the plume will be modified by containment. The responsible individual will document the event and the measures taken to correct the issue, and will report the incident (with photographs) to the Office of Conservation and Coastal Lands as soon as is practicable. Work may continue only after the issue is no longer visible.
8. No contamination of the marine environment shall result from the permitted activities. Particular care must be taken to ensure that no petroleum products, trash or other debris enter near-shore and open ocean waters. When such material is found within the project area, the

Contractor, or his designated construction agent, shall collect and dispose of this material at an approved upland disposal site.

9. Waste materials and waste waters directly derived from maintenance activities shall not be allowed to leak, leach or otherwise enter marine waters.

6.6 Waste Waters

Construction operations shall be conducted so as to prevent discharge or accidental spillage of pollutants, solid waste, debris, and other objectionable wastes in surface waters and underground water sources.

6.7 Erosion Control

1. Silt curtains and/or booms will be individually anchored and regularly inspected during sand placement operations, as needed.
2. Silt curtains and/or booms will be left in place each night, as needed. All anchors and booms will be inspected prior to sunset.
3. The Contractor is responsible for the proper handling, storage and/or disposal of all waste generated by maintenance activities.
4. The Contractor shall confine all maintenance activities to areas defined by the drawings and specifications. No materials shall be stockpiled in the marine environment.
5. The Contractor shall keep maintenance activities under surveillance, management and control to avoid pollution of surface or marine waters. Daily visual inspection of the project site and its environs will be conducted by a designated individual, or his representative, to verify that the permitted activities do not result in uncontrolled adverse environmental impacts.
6. Visual inspections will include monitoring of the effectiveness of the silt curtains and/or booms to ensure proper function.
7. Visual inspections will be documented with photographs and written descriptions, if necessary.
8. Sand fill placement shall not be done during storms or periods of high surf.
9. Visual monitoring will include ongoing inspections for turbidity outside of the confines of the silt curtains and/or booms. In the event that turbidity is observed outside of the silt curtains, work shall stop and the silt curtains shall remain in place until the turbidity dissipates. Silt curtains, booms, and anchors shall be inspected after dissipation and prior to returning to sand retrieval operations.



10. Drainage outlets shall be maintained to minimize erosion and pollution of the waterways during construction. Surface runoff shall be controlled in order to minimize silt and other contaminants entering the water. Should excessive siltation or turbidity result from the Contractor's method of operation, the Contractor shall install silt curtains or other silt contaminant devices as required to correct the problem. Such corrective measures shall be at no additional cost to the Owner.
11. Wherever trucks and/or vehicles leave the site and enter surrounding paved streets, the Contractor shall prevent any material from being carried onto the pavement. Waste water shall not be discharged into existing streams, waterways, or drainage systems such as gutters and catch basin unless treated to comply with the State Department of Health water pollution regulations.
12. During interim grading operations, the grade shall be maintained so as to preclude any damage to adjoining property from water and eroding soil.
13. Temporary berms, cut-off ditches and other provisions which may be required because of the Contractor's method of operations shall be installed at no cost to the Owner.
14. Drainage outlets and silting basins shall be constructed and maintained as directed by the Owner to minimize erosion and pollution of waterways during construction.
15. Mean higher high water will be marked along the shoreline prior to conducting operations to ensure that neither equipment nor fill operate or are placed seaward of mhhw.
16. Operational bounds on land will be marked with traffic cones and patrolled by project staff as needed to ensure that members of the public do not enter the project area.

6.8 Noise Control

1. Best management practices shall be utilized to minimize adverse effects to air quality and noise levels, including the use of emission control devices and noise attenuating devices.
2. Noise shall be kept within acceptable levels at all times in conformance with HAR Title 11 § 46 Community Noise Control, State Department of Health, Public Health Regulations. The contractor shall obtain and pay for a community noise permit from the State Department of Health when equipment or other devices emit noise at levels exceeding the allowable limits.
3. Construction equipment shall be equipped with suitable mufflers to maintain noise within levels complying with applicable regulations.
4. Starting of construction equipment meeting allowable noise limits shall not be done prior to 7:00 a.m. without prior approval of the Engineer. Equipment exceeding allowable noise limits shall not be started up prior to 7:30 a.m.

6.9 Dust Control:

1. Dust, which could damage crops, orchards, cultivated fields and dwellings, or cause nuisance to persons, shall be abated and control measures shall be performed. The Contractor shall be held liable for any damage resulting from dust originating from his operations.
2. The Contractor, for the duration of the contract, shall maintain all excavations, embankments, haul roads, permanent access roads, plant sites, waste disposal areas, borrow areas, and all other work areas within or without the project limits free from dust which would cause a hazard to the work, or the operations of other contractors, or to persons or property. Industry accepted methods of stabilization suitable for the area involved, such as sprinkling or similar methods will be permitted. Chemicals or oil treating shall not be used.
3. The Contractor shall prevent dust from becoming airborne at all times including non-working hours, weekends and holidays in conformance with the State Department of Health, Administrative Rules, Title 11, Chapter 60 - Air Pollution Control.
4. The method of dust control and costs shall be the responsibility of the Contractor.
5. The Contractor shall be responsible for all dust damage claims arising from his work.

6.10 Air Pollution Control:

1. Emission: The Contractor shall not be allowed to operate equipment and vehicles that show excessive emissions of exhaust gases until corrective repairs or adjustments are made to the satisfaction of the Owner.

6.11 Protected Marine Species

1. The project manager shall designate a competent observer to survey the marine areas adjacent to the proposed action for ESA-listed marine species, including but not limited to the green sea turtle, hawksbill sea turtle, and Hawaiian monk seal.
2. Visual surveys for ESA-listed marine species shall be made prior to the start of work each day, and prior to resumption of work following any break of more than one half hour, to ensure that no protected species are in the area (typically within 50 yards of the proposed work).
3. Work shall be postponed or halted when ESA-listed marine species are within 50 yards of the proposed work, and shall only begin/resume after the animals have voluntarily departed the area. If ESA-listed marine species are noticed after work has already begun, that work may continue only if there is no way for the activity to adversely affect the animal(s). For example, divers performing surveys or underwater work (excluding the use of toxic chemicals) is likely safe. The use of heavy machinery is not.



4. Do not attempt to feed, touch, ride, or otherwise intentionally interact with any ESA listed marine species.
5. All on-site project personnel must be apprised of the status of any listed species potentially present in the project area and the protections afforded to those species under federal laws. A brochure explaining the laws and guidelines for listed species in Hawaii, American Samoa, and Guam may be downloaded from:
http://www.nmfs.noaa.gov/prot_res/MMWatch/Hawaii.htm
6. The Contractor shall keep a record of all turtle sightings, incidents of disturbance, or injury, and shall provide a report to the State and the National Marine Fisheries Service (NMFS), and will be the contact person for any issues involving green sea turtles during maintenance activities.
7. Upon sighting of a monk seal or turtle within the safety zone during project activity, immediately halt the activity until the animal has left the zone. In the event a marine protected species enters the safety zone and the project activity cannot be halted, conduct observations and immediately contact NMFS staff in Honolulu to facilitate agency assessment of collected data. For monk seals contact the Marine Mammal Response Coordinator, David Schofield, at (808) 944-2269, as well as the monk seal hotline at (888) 256-9840. For turtles, contact the turtle hotline at 983-5730.
8. The Contractor shall immediately report any incidental take of marine mammals. The incident must be reported immediately to NOAA Fisheries' 24-hour hotline at 1-888-256-9840, and the Regulatory Branch of the USACE at 808-438-9258. In Hawaii, any injuries incidents of disturbance or injury to sea turtles must be immediately reported, and must include the name and phone number of a point of contact, location of the incident, and nature of the take and/or injury. The incident should also be reported to the Pacific Island Protected Species Program Manager, Southwest Region (Tel: 808-973-2987, fax: 808-973-2941).

6.12 Operational Controls

1. This Plan will be reviewed with the project field staff prior to the start of work.
2. All activities significantly impacting the environment will not begin until appropriate BMPP's are properly installed.
3. Construction will be immediately stopped, reduced or modified; and/or new or revised BMPP's will be immediately implemented as needed to stop or prevent polluted discharges to receiving waters.

6.13 Structure, Authority, and Responsibility

The Project Manager/Superintendent/Project Engineer will ensure compliance with this plan.

The Project Manager/Superintendent/Project Engineer will appoint and train one (1) additional individual to properly install all BMPP's and to comply with all aspects of this plan.

6.14 Suspension of Work:

1. Violations of any of the above requirements or any other pollution control requirements which may be specified in the Technical Specifications herein shall be cause for suspension of the work creating such violation. No additional compensation shall be due the Contractor for remedial measures to correct the offense. Also, no extension of time will be granted for delays caused by such suspensions.
2. If no corrective action is taken by the Contractor within 72 hours after a suspension is ordered by the Owner, the Owner reserves the right to take whatever action is necessary to correct the situation and to deduct all cost incurred by the Owner in taking such action from monies due to the Contractor.
3. The Owner may also suspend any operations which he feels are creating pollution problems although they may not be in violation of the above-mentioned requirements. In this instance, the work shall be done by force account.

7. CONTINGENCY PLAN

The following plan will be implemented by the General Contractor to prevent/respond to polluted discharges resulting from a severe storm or natural disaster. It is the General Contractors responsibility to abide by the following plan as well as any other binding plan, agreement, regulation, rule, law, or ordinance applicable.

All contractors associated with the following construction project, Sugar Cove Beach Maintenance, will follow this plan when a severe storm is either forecast or anticipated. General contractors must:

- a. Regularly monitor local weather reports for forecasted and/or anticipated severe storm events, advisories, watches, warnings or alerts. The contractor shall inspect and document the condition of all erosion control measures on that day prior, during, and after the event. The contractor shall prepare for forecasted and/or anticipated severe weather events to minimize the potential for polluted discharges.
- b. Secure the construction site. Securing the site should generally include:
 - i. Removing or securing equipment, machinery, and maintenance materials.
 - ii. Cleaning up all maintenance debris.
 - v. Implementing all Best Management Practices detailed in the Site's SSBMP Plan. This includes BMPs for materials management, spill prevention, and erosion and sediment control.
- c. In the event of a severe weather advisory (hurricanes, tropical storms, natural disasters) or when deemed necessary, cease regular construction operations. Work crews must finalize securing the project site, and evacuate until the severe weather condition has passed.
- d. Upon return to the Site, all BMPs shall be inspected, repaired and/or re-installed as needed. If repair is necessary, it shall be initiated immediately after the inspection and repairs or replacement will be complete within 48 hours. To facilitate repair or replacement, the contractor will be required to store surplus material on the project site if the site is located where replacement materials will not be readily available.
- e. When there either has been a discharge which violates Hawaii Water Pollution rules and regulations OR there is an imminent threat of a discharge which violates Hawaii Water Pollution rules and regulations and/or endangers human and/or environmental health, the permittee shall at a minimum execute the following steps:
 - i. Assess whether construction needs to stop or if additional BMPs are needed to stop or prevent a violation.
 - ii. Take all reasonable measures to protect human and environmental health.
 - iii. Notify responsible parties listed below and immediately notify the DOH of the incident. The notification shall also include the identity of the pollutant sources and the implemented control or mitigation measures.
 1. Mr. Rich Salem – (808) 388-1300
 - 3 Operator/ Emergency Contact Number: TBD
 4. Department of Health
Clean Water Branch (During regular working hours): 808-586-4309



Hawaii State Hospital Operator (After hours): 808-247-2191

- iv Document corrective actions, take photographs of discharge and receiving waters.
- v. Revise Site Specific BMPs Plan to prevent future discharges of a similar nature.



8. EMERGENCY SPILL RESPONSE PLAN

8.1 Pre-Emergency Planning

- a. An initial and periodic assessment shall be made of the project site and potential hazardous spills that may be encountered during the normal course of work. This plan is not intended to address issues relating to materials such as PCB, Lead, Asbestos, etc. since these types of materials would have specific work plans already developed. This plan should be revised as necessary to correspond to the assessment.
- b. A Hazardous Materials inventory list and MSDS sheets, to include subcontractors' materials, will be filed in a binder and located in the Project Office. The inventory list and MSDS sheets will be updated and maintained by the Project Manager and site safety officer; as new materials are added.
- c. Personnel will consult the applicable MSDS sheet prior to its use.
- d. Personnel will handle hazardous materials safely and use personnel protective equipment (PPE), recommended/required by the MSDS, when handling hazardous materials.
- e. Personnel will receive "Hazard Communication" training within three (3) working days of arrival and "product specific" training prior to the initial use/exposure of a product. This training will be conducted by the Project Manager/Superintendent or site safety officer.
- f. All personnel will be trained on the contents of this plan within the first month of maintenance and at least annually thereafter. The training should include a rehearsal of this plan. An attendance sheet will be kept on file at the Project Office.
- g. Only approved containers and portable tanks shall be used for storage and handling of flammable and combustible liquids. Approved safety cans or DOT approved containers shall be used the handling and use of flammable liquids in quantities of five (5) gallons or less. For quantities of one (1) gallon or less, only the original container or approved metal safety can shall be used, for storage, use and handling of flammable liquids.
- h. Flammable or combustible liquids shall not be stored in areas used for exits, stairways, or normally used for the safe passage of people.

8.2 Personal Protective and Emergency Spill Response Equipment

- a. ABC fire extinguishers will be located in the project field office and in each of the company vehicles. There will be at least one fire extinguisher, rated at not less than 10B, within 50 feet of any stockpile of 5 gallons of flammable or combustible liquids or 5 pounds of flammable gas storage.

NOTE: Fire extinguishers should not be located "directly" with hazardous materials, so as to endanger first responders.

- b. Spill kits will be located at the project field office and/or within 50 feet of the hazardous material storage area. The spill kit contents shall be determined by the



Project Manager/Superintendent based on the anticipated hazardous materials to be stored and/or used on the project. The spill kits will be inventoried quarterly and appropriate logbook entries made.

- c. Emergency response personal protective equipment (PPE) consisting of:
 - i. Face shield
 - ii. Tyvex coveralls
 - iii. Rubber gloves
 - iv. Air-purifying respirators with HEPA and organic vapor combination cartridges will be issued to the Emergency Response Team members and maintained in the project office. Separate Respiratory Protection Equipment shall be designated and labeled as such; this equipment will be inspected at least every 30 calendar days and appropriate logbook entries made.

8.3 Personnel Roles, Lines of Authority and Communication

- a. Emergency Response Coordinator (ERC)
 - i. The Project Superintendent is the designated ERC. If the Project Superintendent is not available, the safety officer is the designated ERC.
 - ii. The ERC will be in charge of and will coordinate the appropriate emergency response procedures in this plan.
- b. Emergency Response Team (ERT)
 - i. The ERT consists of Construction General Foreman, Labor Foreman, and a Laborer designated by the Project Superintendent.
 - ii. The ERT will appropriately respond to the emergency in accordance with this plan at direction of the ERC.

8.4 Emergency Alerting and Response Procedures

- a. Any person causing or discovering a known hazardous or unknown release or spill will:
 - i. Immediately alert nearby personnel who may be exposed to the effects of the release or spill.
 - ii. Report the release or spill immediately to the ERC and the ERT. All pertinent information regarding the release should be provided to the ERC, such as the amount and type of material released, location of the release, and other factors, which may affect the response operation.
 - iii. If the spill or release is a petroleum product or known non-toxic chemical, the person will take immediate and appropriate measures to stop or limit the rate of release, (i.e. close the spigot to the drum or form oil or curing compound) and or contain or stop the migration of the release (i.e. create a berm of dirt around the release) until the ERC and ERT arrive.
 - iv. If the spill release is a toxic, highly flammable, or unknown chemical, the person will first notify the ERC before approaching the spill area



- from upwind to determine the source, type, and quantity of the release. The person should monitor the spill until the ERC and ERT arrive.
- v. The ERC will assess possible hazards to human health or the environment that may result from the release, fire, or explosion.
 - vi. If the spill or release is less than 25 gallons of a known petroleum product or non-toxic chemical, the ERC will direct the ERT to contain and cleanup the spill or release.
 - vii. If the spill or release is toxic or unknown, the ERC will immediately notify the County of Hawaii Fire Department and ask for assistance from the HAZMAT Response Team.
 - viii. Immediately after the emergency, the ERC will arrange for disposing of the recovered waste, contaminated soil or any other material that results from the release, fire, or explosion at the project site in accordance with the County of Hawaii and State regulations and manufacturer's instructions (if source of spill or release is known).

8.5 Emergency Notification and Reporting Procedures

- a. In the event that a release enters the storm or sewer system, the ERC will immediately notify the Nation Response Center (NRC) at 1.800.424.8802, the Hawaii Department of Health, Hazard Evaluation and Emergency Response Office (HEER) at 808.586.4249 and LRPC at 808.935.2785.
- b. The ERC will immediately notify appropriate agencies and submit written follow-up notification in accordance with the Hazardous Substance Release Notification Guideline.

8.6 Safe Distance Staging Area

- a. A staging area at safe distance up wind and higher than the location of the spill or release and its source will be immediately established.
- b. Access to the spill or release location will be cleared for emergency vehicles and equipment to be used to contain and clean up the spill or release.

8.7 Site Security and Control

- a. If the spill or release is located on or near the roadway, stop all traffic until the release is cleaned up.
- b. If the spill or release is located away from vehicle or pedestrian traffic, install barricades/safety fencing around the affected area.
- c. If the spill or release occurs during night operations, provide adequate light and use ground guides to escort emergency vehicles to the affected area.

8.8 Evacuation Routes and Procedures

- a. Persons injured during the emergency condition will be evacuated to the staging area where they will be treated and or further evacuated to the nearest medical

- facility. The appropriate MSDS(s) will be provided to emergency service personnel and are intended to be delivered to the emergency room physicians.
- b. Persons working at the affected area and who are not needed in the response effort; will report the staging areas for accountability.

8.9 Decontamination and Disposal Procedures

- a. Persons involved in the spill clean-up are required to perform personal hygiene, utilizing soap and fresh water prior to eating, drinking, or smoking.
- b. Contaminated PPE shall be appropriately cleaned and disinfected if possible. If this is not possible it shall be disposed per the same requirements of the contaminated substance.
- c. Sorbent pads/materials and the spilled substance will be placed in appropriate containers and disposed as specified by the appropriate MSDS.
- d. Contaminated soil will be placed in appropriate container(s) or on plastic sheeting. The ERC will arrange with an environmental services company to properly characterize, prepare the manifest, label the containers, transport, and dispose of the contaminated soil. The generator's copy of the manifest will be kept in the project files for a minimum of three (3) years.
- e. In the event of a substantial release (25 gallons or more) of a suspected or known toxic chemical, the Fire Department HAZMAT Response Team will be called to control/cleanup the release. They will establish and provide the decontamination operations as required.

8.10 Emergency Medical Treatment and First Aid

- a. First aid kits will be maintained at the project field office, all company vehicles, and gang boxes.
- b. Injured person(s) will be treated at the staging area by a certified first aid trained individual at the project site until the ambulance arrives or they are evacuated to the nearest medical facility.
- c. The appropriate MSDS(s) will be provided to emergency service personnel and are intended to be delivered to the emergency room physicians.

8.11 After the Spill Procedures

- a. The ERC will review what happened and implement changes and/or corrections to prevent spill from occurring and to improve the spill response and clean-up procedures. This Plan will be revised to reflect those changes/corrections/improvements implemented.
- b. The ERC will prepare a record of the spill response and keep it in the project files for a minimum of three (3) years.
- c. The ERC will submit Follow-up Notification to HEER when required.
- d. Spill response kits shall be replenished directly after the emergency.



8.12 Emergency Contacts

National Response Center (NRC)	1.800.424.8802
Coast Guard Operations Center, Honolulu (working hours)	1.808.522.8264
(after hours)	1.808.927.0830
Hawaii State Department of Health Hawaii Evaluation and Emergency Response (HEER)	1.808.586.4249
County of Maui Fire Department	911
In the event that a release enters the storm or sewer system, the ERC will immediately notify NRC, HEER, and LEPC	1.808.935.2785
(name), Project Manager, (company)	Tel. No. - TBD
(name), Project Engineer, (company)	Tel. No. - TBD
Chris Conger, Design Engineer, Sea Engineering, Inc.	1.808.259.7966